

11-13-00

A

11/13/00

JC688 U.S. PTO

**UTILITY PATENT APPLICATION TRANSMITTAL
(Large Entity)**

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.
END920000090US1Total Pages in this Submission
4**TO THE ASSISTANT COMMISSIONER FOR PATENTS**Box Patent Application
Washington, D.C. 20231

Transmitted herewith for filing under 35 U.S.C. 111(a) and 37 C.F.R. 1.53(b) is a new utility patent application for an invention entitled:

**METHOD AND APPARATUS FOR PRODUCING PSEUDO-CONSTANT BITS PER PICTURE VIDEO
BIT-STREAMS FOR LOW-DELAY COMPRESSION SYSTEM**

and invented by:

Boice et al.

JC688 U.S. PTO
09/11/02
11/13/00If a **CONTINUATION APPLICATION**, check appropriate box and supply the requisite information:☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: _____

Which is a:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: _____

Which is a:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: _____

Enclosed are:

Application Elements

1. ☒ Filing fee as calculated and transmitted as described below
2. ☒ Specification having 59 pages and including the following:
 - a. ☒ Descriptive Title of the Invention
 - b. ☐ Cross References to Related Applications (if applicable)
 - c. ☐ Statement Regarding Federally-sponsored Research/Development (if applicable)
 - d. ☐ Reference to Microfiche Appendix (if applicable)
 - e. ☒ Background of the Invention
 - f. ☒ Brief Summary of the Invention
 - g. ☒ Brief Description of the Drawings (if drawings filed)
 - h. ☒ Detailed Description
 - i. ☒ Claim(s) as Classified Below
 - j. ☒ Abstract of the Disclosure

UTILITY PATENT APPLICATION TRANSMITTAL
(Large Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.
END920000090US1

Total Pages in this Submission
4

Application Elements (Continued)

3. ☒ Drawing(s) *(when necessary as prescribed by 35 USC 113)*
- a. ☒ Formal Number of Sheets 6
- b. ☐ Informal Number of Sheets _____
4. ☒ Oath or Declaration
- a. ☒ Newly executed *(original or copy)* ☐ Unexecuted
- b. ☐ Copy from a prior application (37 CFR 1.63(d)) *(for continuation/divisional application only)*
- c. ☒ With Power of Attorney ☐ Without Power of Attorney
- d. ☐ DELETION OF INVENTOR(S)
Signed statement attached deleting inventor(s) named in the prior application,
see 37 C.F.R. 1.63(d)(2) and 1.33(b).
5. ☐ Incorporation By Reference *(usable if Box 4b is checked)*
The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.
6. ☐ Computer Program in Microfiche *(Appendix)*
7. ☐ Nucleotide and/or Amino Acid Sequence Submission *(if applicable, all must be included)*
- a. ☐ Paper Copy
- b. ☐ Computer Readable Copy *(identical to computer copy)*
- c. ☐ Statement Verifying Identical Paper and Computer Readable Copy

Accompanying Application Parts

8. ☒ Assignment Papers *(cover sheet & document(s))*
9. ☐ 37 CFR 3.73(B) Statement *(when there is an assignee)*
10. ☐ English Translation Document *(if applicable)*
11. ☒ Information Disclosure Statement/PTO-1449 ☒ Copies of IDS Citations
12. ☐ Preliminary Amendment
13. ☒ Acknowledgment postcard
14. ☒ Certificate of Mailing
- ☐ First Class ☒ Express Mail *(Specify Label No.):* EL598673245US

UTILITY PATENT APPLICATION TRANSMITTAL
(Large Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.
END920000090US1

Total Pages in this Submission
4

Accompanying Application Parts (Continued)

15. ☐ Certified Copy of Priority Document(s) *(if foreign priority is claimed)*

16. ☐ Additional Enclosures *(please identify below):*

Request That Application Not Be Published Pursuant To 35 U.S.C. 122(b)(2)

17. ☐ Pursuant to 35 U.S.C. 122(b)(2), Applicant hereby requests that this patent application not be published pursuant to 35 U.S.C. 122(b)(1). Applicant hereby certifies that the invention disclosed in this application has not and will not be the subject of an application filed in another country, or under a multilateral international agreement, that requires publication of applications 18 months after filing of the application.

Warning

An applicant who makes a request not to publish, but who subsequently files in a foreign country or under a multilateral international agreement specified in 35 U.S.C. 122(b)(2)(B)(i), must notify the Director of such filing not later than 45 days after the date of the filing of such foreign or international application. A failure of the applicant to provide such notice within the prescribed period shall result in the application being regarded as abandoned, unless it is shown to the satisfaction of the Director that the delay in submitting the notice was unintentional.

UTILITY PATENT APPLICATION TRANSMITTAL (Large Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.
END920000090US1

Total Pages in this Submission
4

Fee Calculation and Transmittal


CLAIMS AS FILED

For	#Filed	#Allowed	#Extra	Rate	Fee
Total Claims	80	- 20 =	60	x \$18.00	\$1,080.00
Indep. Claims	8	- 3 =	5	x \$78.00	\$390.00
Multiple Dependent Claims (check if applicable) <input type="checkbox"/>					\$0.00
BASIC FEE					\$690.00
OTHER FEE (specify purpose) _____					\$0.00
TOTAL FILING FEE					\$2,160.00

- ☐ A check in the amount of _____ to cover the filing fee is enclosed.
- ☒ The Commissioner is hereby authorized to charge and credit Deposit Account No. **09-0457 (IBM)** as described below. A duplicate copy of this sheet is enclosed.
- ☒ Charge the amount of **\$2,160.00** as filing fee.
 - ☒ Credit any overpayment.
 - ☒ Charge any additional filing fees required under 37 C.F.R. 1.16 and 1.17.
 - ☐ Charge the issue fee set in 37 C.F.R. 1.18 at the mailing of the Notice of Allowance, pursuant to 37 C.F.R. 1.311(b).

Dated: 11-10-00

cc:

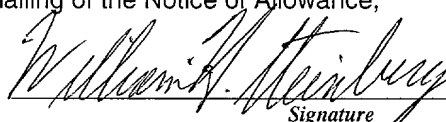
Signature

William H. Steinberg, Esq.
Registration No. 28,540
IBM Corporation
Intellectual Property Law
1701 North Street, N50/040-4
Endicott, New York 13760
Telephone: (607) 755-3207
Facsimile: (607) 755-3250

CERTIFICATE OF MAILING BY "EXPRESS MAIL"

In re Application of: Boice et al.

Title: METHOD AND APPARATUS FOR PRODUCING PSEUDO-CONSTANT
 BITS PER PICTURE VIDEO BIT-STREAMS FOR LOW-DELAY
 COMPRESSION SYSTEM

Attorney Docket No.: END920000090US1

"EXPRESS MAIL" MAILING LABEL NO.: EL598673245US

Date of Deposit: 11/13/00

I hereby certify that this paper is being deposited
with the U.S. Postal Service "Express Mail Post Office
to Addressee" service under 37 CFR 1.10 on the date
indicated above and addressed to: BOX PATENT
APPLICATION, Assistant Commissioner for Patents,
Washington, D.C. 20231.

Chris Lang

(Typed or printed name of person mailing paper or fee)

Chris Lang

(Signature of person mailing paper or fee)

Enclosed:

- * Utility Patent Application Transmittal Letter (3 pages,
in duplicate);
- * Specification (31 pages), Claims (27 pages), and Abstract
(1 page);
- * Formal Drawings (6 Sheets);
- * Declaration and Power of Attorney (3 pages)
(unsigned) (XX signed)
- * Assignment w/Recordation Cover Sheet (2 pages);
- * Information Disclosure Statement (2 pages);
- * Information Disclosure Citation w/references
(1 page) (8 cited)
- * Two (2) postcards

APPLICATION
FOR
UNITED STATES LETTERS PATENT

APPLICANT NAME: Boice et al.

TITLE: METHOD AND APPARATUS FOR PRODUCING PSEUDO-CONSTANT
BITS PER PICTURE VIDEO BIT-STREAMS FOR LOW-DELAY
COMPRESSION SYSTEM

DOCKET NO. END920000090US1

INTERNATIONAL BUSINESS MACHINES CORPORATION

CERTIFICATE OF MAILING UNDER 37 CFR 1.10

I hereby certify that, on the date shown below, this
correspondence is being deposited with the United States
Postal Service in an envelope addressed to the Assistant
Commissioner for Patents, Washington, D.C., 20231 as
"Express Mail Post Office to Addressee" Mailing Label No.
EL598673245US

on 11/13/00

Name of person mailing paper Chris Lang

Signature *Chris Lang* Date 11/13/00

METHOD AND APPARATUS FOR PRODUCING
PSEUDO-CONSTANT BITS PER PICTURE VIDEO
BIT-STREAMS FOR LOW-DELAY COMPRESSION SYSTEM

Technical Field

5 The invention relates generally to the field of digital
video compression, and more particularly, to a facility for
producing a pseudo-constant bits per picture compressed
bitstream in real-time video such as interpersonal or
multimedia communications, e.g., video-conferencing or
10 video-telephony, where the end-to-end encoding/decoding
delay should be low.

Background of the Invention

15 Production and transmission of information has
undergone drastic changes in recent years. This evolution is
mainly due to the availability of reliable and sophisticated
digital communications networks, digital storage media, and
digital compression specifications which have facilitated
emission and management of a wide array of digital assets
such as motion video, image, text, audio, data, and graphic
20 information. Motion video due to its widespread application
in various chains of digital infrastructures and the
abundant information that it carries, has received
significant attention from the research and development
community. As a result, a number of methods have been
25 developed to deal with encoding of moving pictures at
various spatial and temporal sampling rates. These methods
are intended to elevate the use of digital video in

industry, encourage the enhancements of current products,
and finally accelerate the definition of future products.

For example, the MPEG-2 international standard formed
by the Moving Pictures and Expert Group, and described in
5 ISO/IEC 13818-2, "Information Technology - Generic Coding of
Moving Pictures and Associated Audio Information: Video,
1996," which is hereby incorporated herein by reference in
its entirety, adopts the tool-kit approach of "profiles" and
"levels" to encompass the need of many factions within the
10 broadcast, consumer, and entertainment sectors. "Profile"
defines a subset of tools available to encode a video
sequence while "level" deals with spatio-temporal resolution
of a video source.

The book by B. G. Haskell, A. Puri, and A. N.
15 Netravali, Digital Video: An Introduction to MPEG-2, Chapman
and Hall, New York, 1997, which is hereby incorporated
herein by reference in its entirety, explains various
components of an MPEG-2 encoder in detail. Most digital
video encoders rely on some form of an image analyzer, such
20 as Discrete Cosine Transformation (DCT), to exploit intra-
picture pixel-to-pixel redundancies, and motion
estimation/compensation units to remove the inter-picture
pixel-to-pixel redundancies. Since hardware realization of
the above image processing techniques are more practical for
25 rectangularly-shaped groups of pixels, the majority of
specifications for digital video compression adopt a block-
based approach of processing the image data.

A very efficient form of digital video compression is achieved by classifying a plurality of pictures into intra-coded and predicted (or inter-coded) pictures. For an intra-coded picture only the information from the same picture is used to perform the encoding procedure. On the other hand, the image data in inter-coded pictures is predicted by displacing information in other pictures within a defined search area. The concept of searching for the best prediction is known in the art as motion estimation. The difference of the prediction and the picture is then encoded. Therefore, decoding of inter-coded pictures require adding the decoded picture-difference to the displaced picture. The concept of displacing pictures during the decoding procedure is known in the art as motion compensation.

The use of motion estimation and motion compensation methods in inter-coded pictures helps greatly in reducing the amount of consumed bits. For cases where a good prediction is not found for a region of a picture, the encoder can revert back to the intra-coded method to carry out the compression task for this particular region of the picture. An intra versus inter switch can be easily derived for the video encoder. For ease of discussion, intra-coded pictures are referred as *I* coded and predicted-coded pictures are labeled *P* coded. The aforementioned description of a digital video encoder is clear with knowledge of the art of video compression. Further it is clear that a predicted picture would consume a lot less number of bits than an intra-coded picture. This methodology, although very

efficient for producing professional quality video, requires
a large encoder or decoder buffer size and consequently
imposes a longer system delay. This is because the large
intra-coded pictures of the bit-stream have to fit in the
decoder buffer and secondly it takes longer for all the bits
of this type picture to be in the buffer. On the other hand
I pictures are very useful since they facilitate random
accessing and further impose a bound on how long a corrupted
region of the picture would leak into the rest of the
compressed video stream.

A unique application for any type of digital video
encoder is in the area of real-time video communications,
where video-conferencing, video-phone, and monitoring
compression systems with low encoding/decoding delay can be
realized. Such products require a special set of features in
order to be practical and cost effective.

Summary of the Invention

For digital video products where low encoding/decoding
delay is of utmost importance, a different encoding strategy
should be deployed. This strategy should encourage the use
of a small buffer size, which is realized in accordance with
the present invention by producing a near-constant bits per
picture compressed stream.

The specification in ISO/IEC 13818-2 describes a
methodology for low delay encoding applications such as in
visual communications. This method recommends that picture

updating, which is typically done by inserting *I* pictures, can be accommodated by only updating a part of the picture. The rest of the picture is predicted. Parts of the picture which are updated use the same encoding scheme as the one in the intra-coded pictures. This mechanism improves the resilience of the stream in the presence of possible byte corruption or bad prediction. Using this methodology it is possible to create a *P* - only bit-stream, which along with a sophisticated bit-allocation scheme should facilitate the use of a small buffer size. Most specifications and recommendations suggest the updating of a series of pixel blocks from left to right (i.e., across a row of blocks) or from top to bottom (i.e., down a column of blocks) where the updated rows would move from top to bottom and the updated columns would move from left to right as the video is displayed. This approach would ensure that a badly predicted pixel data will not corrupt the rest of the video for ever since it will be updated (intra-coded) within a fixed cycle. However, the above-described compression strategies and prior art dealing with low delay encoding methods do not describe a methodology for producing an almost constant bits per pictures where the source video is moving from one scene to another new scene.

Thus, described herein are a method and apparatus for achieving the requirements of a low delay video encoder. These requirements should guarantee that the actual number of produced bits in a video bit-stream is close to a constant number, specifically when a video shot change is detected, and further, the whole picture is updated without

motion estimation within a pre-selected number of pictures. The present invention is readily applicable to any digital video encoder which employs the concept of motion estimation and motion compensation.

5 Briefly summarized, the present invention comprises in one aspect a method for processing a sequence of video frames. The method includes dynamically encoding the sequence of video frames to produce a pseudo-constant bits per frame compressed signal at a scene change within the
10 sequence of video frames. The dynamically encoding includes: detecting when a new scene occurs in the sequence of video frames; and responsive to the detecting, dynamically determining a group of frequency domain pixel data to be retained for a frame of the new scene.

15 In another aspect, a method for processing a sequence of video frames is provided which includes dynamically encoding the sequence of video frames, where the dynamically encoding includes: encoding multiple blocks of a first frame of the sequence of video frames in intra-coded mode using a first orientation for the intra-coded blocks; and encoding
20 multiple blocks of a second frame of a sequence of video frames in intra-coded mode using a second orientation for the intra-coded blocks, wherein the first orientation and the second orientation are perpendicular.

25 Systems and computer program products corresponding to the above-summarized methods are also described and claimed herein.

Additional features and advantages are realized through the techniques of the present invention. Other embodiments and aspects of the invention are described in detail herein and are considered a part of the claimed invention.

Brief Description of the Drawings

The subject matter which is regarded as the invention is particularly pointed out and distinctly claimed in the claims at the conclusion of the specification. The above objects, advantages and features of the present invention will be more readily understood from the following detailed description of certain preferred embodiments of the invention, when considered in conjunction with the accompanying drawings in which:

FIG. 1 depicts one embodiment of a low-delay digital encoder incorporating and using a frequency domain data management model for producing pseudo-constant bits per pictures at shot changes and an intra updating model in accordance with the principles of the present invention;

FIG. 2 depicts one embodiment of a picture difficulty evaluator in accordance with the present invention;

FIG. 3 is a graph of one embodiment of an N-level quantizer for the picture difficulty indicator of FIG. 2, in accordance with the principles of the present invention;

FIG. 4 depicts one embodiment of a frequency classifier and its frequency pattern classes, in accordance with the principles of the present invention;

FIG. 5 depicts one embodiment of a frequency
5 constrainer in accordance with the principles of the present invention; and

FIG. 6 depicts one embodiment of logic associated with one example of disseminating intra-coded blocks of pixels throughout a video stream in a pseudo-random fashion in
10 accordance with one aspect of the present invention.

Best Mode for Carrying out the Invention

The present invention recognizes that the conventional method of picture updating for low delay applications, i.e., the example in ISO/IEC 13818-2, does not provide suitable
15 video quality. This is due to the fact that intra-coded blocks of a picture will always produce less artifacts than predicted blocks, and further, the monotonic way of updating one row or column as if they are rolling downward or
sideway, respectively, from picture to picture creates
20 sufficient time for a viewer to comprehend inconsistencies in video quality. This quality variation can be described as a worm-like phenomena which is more easily detected in video sources comprised of lots of image details and a small but
constant picture velocity. Under this scenario, the intra-
25 coded rows or columns which consume a large portion of the picture bit-budget are easily identified. Of course, one can

minimize the bit-budget of the intra-coded blocks to ensure a more consistent video quality, but this quality sacrifice would jeopardize the reliability of a good reference block for regions of the picture where motion compensation is to be performed.

Therefore, the present invention proposes disseminating the intra-coded blocks in a pseudo-random format within the picture, thereby offering a more consistent video quality than the systematic way of rolling over a series of rows or columns of blocks of pixels. The low delay encoding approach described herein uses an intra versus inter block pattern generating scheme to ensure the whole scene is updated after a fixed pre-defined number of P pictures. Moreover, the formation of the intra-coded blocks are in such a way that the human eye cannot track down the high fidelity regions of a real-time motion video. This is accomplished by forcing the scattered intra-coded blocks to move bidirectionally. The collection of intra-coded blocks undergoes spatio-temporal subsampling. The resultant subsampled grid when overlaid on top of the output from the intra/inter switch of the encoder generates video bit-streams which are significantly better than previous approaches to low delay compression. The approach presented herein does not create a visible discontinuity between intra-coded and predicted blocks of a picture.

The present invention uses modifications to the rate-control algorithm of a digital video encoder to create a pseudo-constant bits per picture stream. This is achieved by

assigning the same picture type P and the same number of bits to each picture of the video source. A frequency-domain data management model is implemented for shot changes to ensure that all pictures of the compressed stream are represented with a pseudo-constant number of bits. One embodiment of the invention and how the same number of bits is substantially achieved throughout the video bit-stream is discussed.

Low Delay Encoding Scheme

FIG. 1 shows one example of a low delay digital video encoder 100 which includes an intra updater 110 and a frequency domain data management model 120 for generating pseudo-constant bits per picture in accord with the present invention. The intra updater 110 and frequency domain data management model 120 are described in detail further below.

For a generic low delay encoder, intra-coding of a block of pixels is achieved by applying a block-based Discrete Cosine Transformer (DCT) 140, followed by a Block Quantizer (BQ) 150, and then a Variable Length Coder (VLC) 160. The header generation unit 170 is responsible for creating video sequence headers and the necessary start codes which are in compliance with a given video compression standard. The encoder buffer 172 has the responsibility of absorbing the picture-to-picture bit-fluctuations (which should be small for low delay applications) as generated by the VLC unit 160 and outputting a constant bits per picture compressed stream for transmission over a selected channel.

Since the encoder buffer 172 is of finite size, special measures have to be accounted for to ensure that buffer overflows or underflows do not occur. This is accomplished by monitoring the content of the buffer and sending this information to a picture Rate-Control (RC) model 182 within a picture bit-allocation model 180. This RC model will then impose certain limits on the picture bits.

An integral part of any video compression engine is the picture bit-allocation model 180 shown in FIG 1. Based on the desired average bit-rate of the bit-stream, the user defines the actual number of bits 183 assigned to each picture. Since the output of the encoder is a *P* - only stream, this pre-determined number has a constant value. The picture RC model 182 may adjust this selection by compensating for any deviations from the targeted bit-rate. The adjustment factor is derived by comparing the output of the picture bits counter 185 against the target bits assigned by the picture RC model 182 using the picture bits comparator unit 184. Additional adjustments are carried out through a feed-back loop from encoder buffer 172 occupancy. The picture bits counter 185 reads in the number of bits associated with each VLC codeword to obtain the total number of bits for each picture.

The picture RC model 182 takes several statistical measures as inputs. These are an activity measure, outputted by a block processor 105, an actual picture quantization number from the block-based quantizer-modulator (Q-modulator) unit 186, and finally an actual picture bit count

from picture bits counter unit 185. These parameters, along with information collected from the encoder buffer fullness and the user-defined picture bits, are used to determine an ideal picture bits number for the next picture to be encoded. The picture RC model 182 will ultimately compute a picture quantization value and input this along with the ideal picture bits to the block-based Q-modulator 186. The role of the block-based Q-modulator 186 is to ensure that the final picture count is close to the target picture bits computed by the picture RC model 182. This task is facilitated by the picture bits comparator unit 184 which computes the difference between the accumulated actual picture count and the properly scaled target picture bits after each block of pixels is encoded. The difference number for the processed blocks along with an encoder buffer 172 occupancy measure are used to modulate the picture quantization value (previously provided by the picture RC model) at the block level. Finally, the block-based Q-modulator unit 186 sends a nominal quantizer value to the BQ unit 150 which will implement the quantization of the image block.

For predicted-coding of a block of pixels, in one embodiment, the present invention employs the components of an intra-picture encoder previously described, plus units such as the motion estimation unit (MEU) and motion compensation unit (MCU). In this mode of operation, two consecutive pictures of the input video, i.e., P_t and P_{t+1} , are stored in the memory unit 107. For each block of P_{t+1} , a prediction is formed by displacing a block of P_t (having the

same coordinates as the block of P_{t+1}) within a motion
 window, and searching for the best match. This process is
 performed by the MEU 109. It should be noted that a video
 decoder used to decompress the output of the low delay
 5 encoder has only access to the decompressed (or
 reconstructed) pictures. For example, reconstruction of
 picture P_{t+1} at the decoder output requires reconstruction of
 picture P_t which is labeled as \hat{P}_t in memory 107. In order to
 minimize the drift between the reconstructed pictures at the
 10 encoder and decoder sides, consideration should be made to
 displacing the blocks of P_t at the encoder side. As a
 result, it is more efficient to perform the motion
 estimation (ME) task in two steps. In the first step, MEU
 109 computes an estimation for each block of P_{t+1} using a
 15 block of P_t . This estimate is uniquely defined by a set of
 motion vectors which describe the displacement of the
 predicted block from its original location in horizontal and
 vertical directions. In the second step, the motion vectors
 of the first step are used as an initial guess to displace a
 20 block of \hat{P}_t corresponding to a block of P_{t+1} , and finally
 refining it within a motion window to obtain the best
 prediction for P_{t+1} . Therefore, it is required to store the
 reconstructed picture \hat{P}_t in the memory unit 107.

It is possible that during the ME task, a good
 25 prediction cannot be found for a block under consideration
 and, hence, it is more advantageous to encode the block as
 intra-coded. This decision is made by an intra/inter decider

unit 111. If this unit decides to encode a block in intermode, a block of P_t corresponding to a source block in P_{t+1} is motion-compensated by MCU 113 using the proper motion vectors. The output of MCU is subtracted from the source block in P_{t+1} and the resulting block difference, defined as motion compensated block difference (MCBD), is sent to the DCT unit as a subtraction 115 from the source signal. Since the encoder 100 is also responsible for reconstructing pictures, the MCBD blocks are decoded and added to the output of the MCU unit 113 for forwarding to an adder 194. Decoding is comprised of sending the output of BQ unit 150 to the Inverse Block Quantizer (IBQ) 190 and then to an Inverse DCT (IDCT) unit 192. No MCU task is needed for reconstructing blocks of the picture encoded in intra-coded mode.

1. Frequency Domain Data Management Scheme For Production Of Pseudo-Constant Bits Per Pictures At Shot Changes

A minimum achievable amount of encode/decode delay in a compression system is strongly related to buffer size designed into the system. An aggressive low delay encoder should have a very small buffer size. For a steady-state motion video where transient changes are minimal, this goal is easily achievable. However, if there are sudden changes in the transient behavior of the input video (e.g., a shot change), or if the user decides to input a different source (e.g., change a channel in real-time), a small buffer size will have trouble dealing with large compressed pictures. In this case the decoder buffer will underflow (i.e., overflow condition for encoder buffer). If the compressed picture is

too small, the decoder buffer will overflow (i.e., underflow condition for the encoder buffer). In order to circumvent such scenarios, a unique data management model in frequency domain 120 (FIG. 1) is presented herein for cases where there are abrupt changes in transient behavior of input video. This model removes any glitches in the perceived video that are otherwise caused by buffer overflow or underflow of prior low delay encoders at shot (i.e., scene) changes. The components of a frequency domain data management model in accordance with one embodiment of the present invention are described below. This frequency domain data management model is geared toward production of pseudo-constant bits per picture compressed bit-streams in the presence of any form of shot changes.

1.1 Shot-Change Detector

There are many methods of detecting a shot-change in an incoming video stream. One method is to compare the mean of luminance and chrominance components of two consecutive pictures P_t and P_{t+1} to examine if P_{t+1} belongs to a new scene. Let $y_t(i,j)$, $cb_t(i,j)$, and $cr_t(i,j)$ represent the pixel intensities of a YCbCr digital picture at time t and coordinate (i,j) , wherein i and j represent the row and column indices, respectively. If $m = m_r \times m_c$ is the number of pixels in the luminance component Y of a picture, then

the luminance picture mean would be $\bar{y}_t = \frac{1}{m} \sum_{i=0}^{m_r-1} \sum_{j=0}^{m_c-1} y_t(i,j)$.

The number of rows and columns of Y are defined by m_r and m_c , respectively. Similarly one can compute the chrominance

picture mean for component *Cb* as $\bar{c}b_t = n^{-1} \sum_{i=0}^{n_r-1} \sum_{j=0}^{n_c-1} cb_t(i,j)$,

and for component *Cr* as $\bar{c}r_t = n^{-1} \sum_{i=0}^{n_r-1} \sum_{j=0}^{n_c-1} cr_t(i,j)$ with $n = n_r \times n_c$

being the number of pixels in the chrominance components. n_r and n_c are the number of rows and columns for a color component, respectively. The three picture means are computed by the pre-processor 118 of FIG. 1 and sent to the shot-change detector unit 121. The shot-change detector 121 will compute an indicator SCI as

$$SCI = (a_1 + a_2 + a_3)^{-1} (a_1 |\bar{y}_{t+1} - \bar{y}_t| + a_2 |\bar{c}b_{t+1} - \bar{c}b_t| + a_3 |\bar{c}r_{t+1} - \bar{c}r_t|)$$

A typical value for a_1 is 2.0, and for a_2 and a_3 one can use 1.0. The shot-change detector unit will then decide if a shot change is detected by comparing the value of SCI against a pre-determined number (for example, a threshold (Th) of $Th = 10.0$). If $SCI > Th$, a shot-change is declared and a signal is sent to the MEU unit 109. The MEU will inform the intra/inter decider 111 that the whole picture is encoded in intra-coded mode. Shot-change detector 121 will also send a signal to a bi-state switch 122 which would toggle between frequency-constraining and non-constraining modes. When a shot change is detected, the frequency-domain data management model 120 is informed that for this picture frequency-constraining 123 is required and the switch is subsequently flipped to a "b" position. For normal video, i.e., no presence of shot changes, the bi-state switch is in "a" position. It should be noted that the very first picture of a video source is always treated as a shot change and its encoding task follows the same rules applied to pictures

that are declared as new scenes within the stream.

1.2 Picture Difficulty Evaluator

When a shot-change is detected, the difficulty of the picture in the new scene is evaluated by assessing a set of picture-based statistical measures. A picture is defined as being difficult if it is composed of lots of dissimilar image structures. Examples of image structures are textures, edges, spatial details, and color bursts. A picture with many local image structures will yield frequency coefficients which are oriented in different directions and have modest to large amplitudes upon DCT implementation. Therefore, many VLC codewords are required to represent the picture in compressed format which in turn will use a large amount of bits. Such a large picture may not fit in the encoder or the decoder buffer. On the other hand, the least difficult picture will have few fine details, if any. For this picture, the degree of sharpness in edges or the intensity in colors are significantly reduced.

In the present invention, the pre-processor 118 of FIG. 1 will perform a set of inter-pixel calculations on an input picture P_t . These calculations are carried out in four directions: horizontal, vertical, southwest to northeast diagonal, and southeast to northwest diagonal. Since picture P_t can be interlaced or progressive in nature, all inter-pixel calculations have to be done for both picture formats. The syntax of most digital video encoders permits the compression to be implemented in interlaced or progressive

input mode. Further, pixel processing of an interlaced picture (which is composed of two fields), can be done in frame or field format. This is typically referred to as frame or field encoding and is obvious to someone who is familiar with the art of digital video compression. Further, it should be obvious that an interlaced frame is comprised of two interleaved fields sampled at different times. Therefore, if an interlaced frame is decomposed into two fields, two pictures in field formats having half the resolution of the interlaced frame are formed.

For purposes of discussion, the following definitions apply: the frame-based horizontal inter-pixel differences is defined as Z_h , frame-based vertical inter-pixel differences as $Z_{F,v}$, frame-based 45° diagonal inter-pixel differences as $Z_{F,d45}$, and frame-based 135° diagonal inter-pixel differences as $Z_{F,d135}$. The field-based inter-pixel differences for horizontal, vertical, 45° diagonal, and 135° diagonal are defined as Z_h , $Z_{f,v}$, $Z_{f,d45}$, and $Z_{f,d135}$, respectively. It should be noted that for either frame or field processing, the task of horizontal inter-pixel differencing remains in tact since pixel data in the same memory locations will be fetched. For frame encoding mode of an interlaced picture, statistical measures are performed on both frame and field formats and a set of inter-pixel indicators are fed to the picture difficulty evaluator 124 of FIG. 2. For encoding of progressive pictures, all inter-pixel indicators are frame-based. For both progressive and interlaced sources, picture P_t is stored in the memory unit 107 of FIG.1 in a frame format. Parameter Z_h for picture P_t is calculated as:

(2)

$$\begin{aligned}
Z_h = & (g_1 + g_2 + g_3)^{-1} (m - m_r)^{-1} \sum_{i=0}^{m_r-1} \sum_{j=0}^{m_c-2} g_1 |y_t(i, j) - y_t(i, j+1)| \\
& + (n - n_r)^{-1} \sum_{i=0}^{n_r-1} \sum_{j=0}^{n_c-2} g_2 |cb_t(i, j) - cb_t(i, j+1)| \\
& + (n - n_r)^{-1} \sum_{i=0}^{n_r-1} \sum_{j=0}^{n_c-2} g_3 |cr_t(i, j) - cr_t(i, j+1)|
\end{aligned}$$

Other frame-based statistical measures for either interlaced or progressive pictures are calculated as:

$$\begin{aligned}
Z_{F,v} = & (g_1 + g_2 + g_3)^{-1} (m - m_c)^{-1} \sum_{j=0}^{m_c-1} \sum_{i=0}^{m_r-2} g_1 |y_t(i, j) - y_t(i+1, j)| \\
& + (n - n_c)^{-1} \sum_{j=0}^{n_c-1} \sum_{i=0}^{n_r-2} g_2 |cb_t(i, j) - cb_t(i+1, j)| \\
& + (n - n_c)^{-1} \sum_{j=0}^{n_c-1} \sum_{i=0}^{n_r-2} g_3 |cr_t(i, j) - cr_t(i+1, j)|
\end{aligned} \tag{3}$$

$$\begin{aligned}
Z_{F,d45} = & (g_1 + g_2 + g_3)^{-1} (m_r - 1)^{-1} (m_c - 1)^{-1} \sum_{i=1}^{m_r-1} \sum_{j=0}^{m_c-2} g_1 |y_t(i, j) - y_t(i-1, j+1)| \\
& + (n_r - 1)^{-1} (n_c - 1)^{-1} \sum_{i=1}^{n_r-1} \sum_{j=0}^{n_c-2} g_2 |cb_t(i, j) - cb_t(i-1, j+1)| \\
& + (n_r - 1)^{-1} (n_c - 1)^{-1} \sum_{i=1}^{n_r-1} \sum_{j=0}^{n_c-2} g_3 |cr_t(i, j) - cr_t(i-1, j+1)|
\end{aligned} \tag{4}$$

$$\begin{aligned}
Z_{F,d135} = & (g_1 + g_2 + g_3)^{-1} (m_r - 1)^{-1} (m_c - 1)^{-1} \left(\sum_{i=0}^{m_r-2} \sum_{j=0}^{m_c-2} g_1 |y_t(i, j) - y_t(i+1, j+1)| \right. \\
& + (n_r - 1)^{-1} (n_c - 1)^{-1} \sum_{i=0}^{n_r-2} \sum_{j=0}^{n_c-2} g_2 |cb_t(i, j) - cb_t(i+1, j+1)| \\
& \left. + (n_r - 1)^{-1} (n_c - 1)^{-1} \sum_{i=0}^{n_r-2} \sum_{j=0}^{n_c-2} g_3 |cr_t(i, j) - cr_t(i+1, j+1)| \right)
\end{aligned} \tag{5}$$

Field-based statistical measures for interlaced pictures, where frame encoding mode is considered, are calculated as:

$$Z_{f,v} = \frac{f_1 Z_{f,v}^{\text{top}} + f_2 Z_{f,v}^{\text{bot}}}{f_1 + f_2} \tag{6}$$

$$Z_{f,d45} = \frac{f_1 Z_{f,d45}^{\text{top}} + f_2 Z_{f,d45}^{\text{bot}}}{f_1 + f_2} \tag{7}$$

$$Z_{f,d135} = \frac{f_1 Z_{f,d135}^{\text{top}} + f_2 Z_{f,d135}^{\text{bot}}}{f_1 + f_2} \quad (8)$$

with $f_1 = 1.0$ and $f_2 = 1.0$, and top and bot representing top and bottom fields of an interlaced frame, respectively. Each line of the top field of an interlaced frame is spatially located above a line of the bottom field of the same frame. Components of equations (6), (7) and (8) can be computed as:

$$\begin{aligned} Z_{f,v}^x = & (g_1 + g_2 + g_3)^{-1} (m/2 - m_c)^{-1} \sum_{j=0}^{m_c-1} \sum_{i=0}^{m_r/2-2} g_1 |y_t(2i + o_x, j) - y_t(2(i+1) + o_x, j)| \\ & + (n/2 - n_c)^{-1} \sum_{j=0}^{n_c-1} \sum_{i=0}^{n_r/2-2} g_2 |cb_t(2i + o_x, j) - cb_t(2(i+1) + o_x, j)| \\ & + (n/2 - n_c)^{-1} \sum_{j=0}^{n_c-1} \sum_{i=0}^{n_r/2-2} g_3 |cr_t(2i + o_x, j) - cr_t(2(i+1) + o_x, j)| \end{aligned} \quad (9)$$

$$\begin{aligned}
Z_{f,d45}^x &= (g_1 + g_2 + g_3)^{-1} \\
&\times (m_r/2-1)^{-1}(m_c-1)^{-1} \sum_{i=1}^{m_r/2-1} \sum_{j=0}^{m_c-1} g_1 |y_t(2i+o_x,j) - y_t(2(i-1)+o_x,j+1)| \\
&+ (n_r/2-1)^{-1}(n_c-1)^{-1} \sum_{i=1}^{n_r/2-1} \sum_{j=0}^{n_c-1} g_2 |cb_t(2i+o_x,j) - cb_t(2(i-1)+o_x,j+1)| \\
&+ (n_r/2-1)^{-1}(n_c-1)^{-1} \sum_{i=1}^{n_r/2-1} \sum_{j=0}^{n_c-1} g_3 |cr_t(2i+o_x,j) - cr_t(2(i-1)+o_x,j+1)|
\end{aligned} \quad (10)$$

$$\begin{aligned}
Z_{f,d135}^x &= (g_1 + g_2 + g_3)^{-1} \\
&\times (m_r/2-1)^{-1}(m_c-1)^{-1} \sum_{i=0}^{m_r/2-1} \sum_{j=0}^{m_c-1} g_1 |y_t(2i+o_x,j) - y_t(2(i+1)+o_x,j+1)| \\
&+ (n_r/2-1)^{-1}(n_c-1)^{-1} \sum_{i=0}^{n_r/2-1} \sum_{j=0}^{n_c-1} g_2 |cb_t(2i+o_x,j) - cb_t(2(i+1)+o_x,j+1)| \\
&+ (n_r/2-1)^{-1}(n_c-1)^{-1} \sum_{i=0}^{n_r/2-1} \sum_{j=0}^{n_c-1} g_3 |cr_t(2i+o_x,j) - cr_t(2(i+1)+o_x,j+1)|
\end{aligned} \quad (11)$$

where x represents the type of field, i.e., top or bot, and for x = top, $0_x = 0_{top} = 0$ and for x = bot, $0_x = 0_{bot} = 1$. For the case where the encoder is set in the field encoding mode, each picture is stored in the memory unit of FIG.1 as a field. In this case, all inter-pixel statistical measures are computed using equations (2), (3), (4), and (5) with m_r and n_r taking on the field resolutions for luminance and chrominance components, respectively. Finally, an example for values of g_s are: $g_1=2.0$, $g_2=1.0$, and $g_3=1.0$.

In accordance with one embodiment of the present invention, a set of picture-based statistical measures (Z_h , $Z_{F,v}$, $Z_{F,v}$, $Z_{F,d45}$, $Z_{F,d45}$, $Z_{F,d135}$, and $Z_{F,d135}$) are fed to the

picture difficulty evaluator 124 of FIG. 2. Depending on the encoder's mode of operation or the nature of the input source, a sub-set of statistical indicators are computed and sent to the difficulty measure comparator. For example, if the user knows the source is progressive, only Z_h , $Z_{F,v}$, $Z_{F,d45}$, and $Z_{F,d135}$ are calculated with the proper frame resolutions, and all switches 125 corresponding to these indicators are turned on in FIG. 2. If the source is interlaced and the user sets the encoder in field encoding mode, again the indicators Z_h , $Z_{F,v}$, $Z_{F,d45}$, and $Z_{F,d135}$ are calculated, this time with field resolutions. For the aforementioned cases a final statistical measure Z_{max} is obtained by a difficulty measure comparator 126 such that:

$$Z_{max} = \text{MAX}(Z_h, Z_{F,v}, Z_{F,d45}, Z_{F,d135}) \quad (12)$$

If the user sets the encoder for frame encoding mode of an interlaced source, all seven inputs to picture difficulty evaluator of FIG. 2 are present and computed, i.e., Z_h , $Z_{F,v}$, $Z_{f,v}$, $Z_{F,d45}$, $Z_{f,d45}$, $Z_{F,d135}$, and $Z_{f,d135}$. This means that all switches 125 to picture difficulty evaluator 124 of FIG. 2 are now turned on. In this case, Z_{max} is obtained by select maximum number logic 127 as:

$$Z_{max} = \text{MAX}(Z_h, \min(Z_{F,v}, Z_{f,v}), \min(Z_{F,d45}, Z_{f,d45}), \min(Z_{F,d135}, Z_{f,d135})) \quad (13)$$

Parameter Z_{max} indicates how difficult a picture is and further, the most difficult pictures (example, large Z_{max} values) will likely consume the most amount of bits.

Considering a broad class of video sequences, Z_{max} can potentially possess a wide range. In order to classify every video shot, a mapping technique is employed which forms a dependency between the picture-based statistical measure Z_{max} and a level of encoding difficulty. The number of levels are finite, and therefore, every possible value of Z_{max} can be mapped into a level. The mapping function is defined by the N-level quantizer $Q(Z_{max})$ and incorporate this into the picture difficulty evaluator 124 of FIG. 2. One embodiment of the mechanism of the N-level quantizer 128 is depicted in FIG. 3. Every value of Z_{max} is fed to the N-level quantizer and a parameter defined as D_f is provided (see FIG. 2) as output. As one example, a value of $N=13$ is used for the $Q(Z_{max})$ quantizer of FIG. 3, but any number of levels greater than or equal to two could be derived for N in accordance with the present invention.

The quantizer of FIG. 3 will operate on Z_{max} and compute D_f through

$$D_f = \begin{cases} L_N & \text{if } Z_{max} \geq T_2 \\ L_1 & \text{if } Z_{max} \leq T_1 \\ \text{INT}\left(\frac{L_N - L_1}{T_2 - T_1} Z_{max} + \frac{T_2 L_1 - T_1 L_N}{T_2 - T_1} + \frac{1}{1+a}\right) & \text{otherwise} \end{cases} \quad (14)$$

Where $INT(.)$ denotes the largest integer number which is smaller than the argument of the function. Threshold parameters of equation (14) are $T_1 = 2$ and $T_2 = 11$ and the

limits on levels $L_1 = 1$, $L_N = 13$. Parameter $(1 + a)^{-1}$ controls the positions of the centroids of step sizes of the quantizer function along the Z_{max} axis. A large value for this parameter will shift the centroids to the left and a smaller value will have an opposite impact. The quantizer of FIG. 3 is drawn with $a = 1$. This means that we are more biased toward declaring pictures as difficult. Finally, the dashed line of FIG. 3 is a representation of the argument of the $INT(.)$ function with no adjusting parameter $(1 + a)^{-1}$.

1.3 Frequency Classifier

FIG. 4 displays one possible way of partitioning the frequency coefficients of an 8 x 8 DCT block 400 of a picture into different pattern classes 410. Since the coefficients are oriented such that their significance decreases from left to right and top to bottom, the partitioning strategy should favor the most significant values located near the top left of the 8 x 8 block 400 and other classes are formed by expanding into the next set of coefficients. The approach of FIG. 4 uses 13 pattern classes 420 and each class takes the shape of a right-angle triangle. Other number of pattern classes or other formations such as squares or rectangles or any other shape could be used in accordance with the present invention.

Difficulty measure D_f is sent to the frequency classifier 440 of FIG. 4 and matched against a look-up table 450. The look-up table has a number of frequency pattern

classes 420 in store. A pattern S_{L_i} is selected 460 by the frequency classifier 440 such that $D_f = L_i$. Pattern classes are indexed so that the lowest order class is associated with the least difficult picture (example, $D_f = L_1$), and will carry more DCT coefficients throughout the encoding procedure than the most difficult picture (example, $D_f = L_N$) corresponding to the highest order class.

1.4 Frequency Constrainer

The selected pattern S_{L_i} along with the DCT coefficients are sent to the frequency constrainer 123 of FIG. 5 after a scene change is detected (switch 122 of FIG. 1 is in "b" position). If the coefficients belong to the set S_{L_i} , they will be kept 510, otherwise they will be discarded 520. Therefore, a constrained set of DCT coefficients is passed through the frequency constrainer 123 and fed to the BQ unit 150 (FIG. 1) for quantization. Such a difficult picture can yield many number of bits in compressed form, a chosen pattern such as $S_{L_{12}}$ Or $S_{L_{11}}$ leads to an aggressive frequency constraining which in turn contributes to providing a pseudo-constant bits per picture video bit-stream. If the encoder does not use any constraining mechanism, difficult pictures would cause the decoder buffer to underflow.

1.5 Zero-Bytes Generator

For some shot-changes, where the new scene is composed of very easy material such as black or grey pictures, the use of the most conservative frequency pattern classes may not result in compressed picture sizes which are close to the nominal value of the user-defined average picture bits R_a of the bit-stream. For these scenarios, a zero-byte generation mechanism is adopted to circumvent the decoder buffer from overflowing. After the final picture count, the actual value of picture bits R_r is supplemented with a number of zero bytes equivalent to:

(15)

$$R_z = (R_a - g_d) - R_r$$

The nominal values of R_a and R_r are fed to the zero-byte generator 130 of the frequency domain data management model of FIG. 1 and R_z zero bytes are computed according to equation (15) and sent to the VLC unit 160. Zero bytes are stuffed at the end of the picture in the compressed bit-stream. Constant value g_d is a user-defined number to control the number of zero bytes. A user with a large tolerance for picture bits fluctuations in low delay mode of operation may wish to use a larger g_d . For applications where fluctuations are not tolerated, g_d should be zero. A typical value for most applications is $g_d = 64$ bits.

2.3. Intra Updater

The intra updater 110 (FIG. 1) of the present invention adopts a unique approach to block coding in intra mode which

is different than prior attempts to updating regions of pictures. Most of the art related to low delay encoding employs a systematic way of sweeping through the pictures of the input video. Here, it is guaranteed that the whole
5 picture is updated by unidirectionally moving large blocks of intra-coded pixels. This approach, although simple and easy to implement, introduces a disturbing effect in the quality of the video stream. The intra-coded image blocks are viewed as if they are raised out of the surface of the
10 video screen. This discontinuity phenomena, caused by not uniformly distributing block artifacts, is easily witnessed by a viewer.

The approach of the present invention to intra updating uses a mechanism to disseminate blocks of intra-coded pixels throughout the picture and thereby provides a more feasible
15 approach to uniform distribution of compression artifacts. Further, the orientation of scattered intra-coded blocks is changed herein for every picture to minimize the impact of the encoding distortions. This results in alternating
20 between blocks oriented in the northwest-southeast directions and blocks oriented in the northeast-southwest direction which move in opposite directions. Each orientation is composed of two classes of decimated diagonal intra-coded blocks which are equally spaced along a path
25 perpendicular to their orientation and cover the surface of the picture.

FIG. 6 shows one embodiment of an intra updater where after 2^{n_f} number of pictures, the whole picture is updated using a block-based intra-coding approach. The block processor 105 of FIG. 1 provides updating parameter $U_f = 2^{n_f}$, picture number K , row block index B_r , and column block index B_j to intra updater 110 of FIG. 6. If K represents the first picture 600, a cycle counter 610 defined as c is set at zero to denote the beginning of a cycle. A binary representation of B_r is AND gated 620 with 1 and the output is defined as b_1 . If B_r indicates 630 an even row of the picture (example, output of AND gate is $b_1 = 0$), then a block address G is computed 640 as:

(16)

$$G = B_j + B_I + c$$

otherwise, for an odd row of the picture (example, $b_1 \neq 0$), G is computed 650 as:

(17)

$$G = \left| B_j - B_I - c \right|$$

Binary representations of G and $U_f - 1$ 665 are AND gated 660 and output b_2 is compared 670 with zero. If the result is zero, i.e., G is a multiple of U_f , then the block under process is declared an intra block 680 and the information is sent to the intra/inter decider 111 and MEU units 109 of FIG. 1. Otherwise, the intra/inter decider 111 will determine the modality of the encoded block. For cases where K is not the first picture, it will be examined to see

if the picture is within the cycle of updating or not. This is done by testing the equality $c + 1 = U_f$ 690. If the equality condition holds true, one whole cycle is processed and counter c is re-set to zero 610 denoting that a new
5 cycle is about to begin. Otherwise counter c is incremented by one 700. For both cases c is fed to the block that computes the address G .

The present invention can be included, for example, in an article of manufacture (e.g., one or more computer
10 program products) having, for instance, computer usable media. This media has embodied therein, for instance, computer readable program code means for providing and facilitating the capabilities of the present invention. The articles of manufacture can be included as part of the
15 computer system or sold separately.

Additionally, at least one program storage device readable by machine, tangibly embodying at least one program of instructions executable by the machine, to perform the capabilities of the present invention, can be provided.

20 The flow diagrams depicted herein are provided by way of example. There may be variations to these diagrams or the steps (or operations) described herein without departing from the spirit of the invention. For instance, in certain cases, the steps may be performed in differing order, or
25 steps may be added, deleted or modified. All of these variations are considered to comprise part of the present invention as recited in the appended claims.

While the invention has been described in detail herein
in accordance with certain preferred embodiments thereof,
many modifications and changes therein may be effected by
those skilled in the art. Accordingly, it is intended by
5 the appended claims to cover all such modifications and
changes as fall within the true spirit and scope of the
invention.

Claims

1 1. A method for processing a sequence of video
2 frames, said method comprising:

3 dynamically encoding said sequence of video frames
4 to produce a pseudo-constant bits per frame compressed
5 signal at a scene change within said sequence of video
6 frames, said dynamically encoding comprising:

7 detecting when a new scene occurs in the
8 sequence of video frames; and

9 responsive to said detecting, dynamically
10 determining a group of frequency domain pixel data
11 to be retained for a frame of the new scene.

1 2. The method of claim 1, wherein said dynamically
2 determining comprises determining a level of frequency
3 domain pixel data to be retained from multiple predefined
4 levels, and wherein said determining determines the level of
5 frequency domain pixel data to be retained for an initial
6 frame of the new scene.

1 3. The method of claim 2, wherein said level of
2 frequency data to be retained is associated with a frequency
3 constraining pattern, and said determining comprises
4 selecting a frequency constraining pattern to be employed
5 from a plurality of frequency constraining patterns
6 associated with said multiple predefined levels.

1 4. The method of claim 3, wherein said plurality of
2 frequency patterns comprise a common geometrical shape, and
3 wherein said common geometrical shape of said plurality of
4 frequency patterns can be one of a plurality of common
5 geometrical shapes.

1 5. The method of claim 3, wherein at least one most
2 significant frequency pixel is included by each of the
3 plurality of frequency constraining patterns.

1 6. The method of claim 1, wherein said dynamically
2 determining comprises determining said group of frequency
3 domain pixel data to be retained for said frame of the new
4 scene by evaluating picture difficulty of the new scene.

1 7. The method of claim 6, wherein said dynamically
2 determining further comprises ascertaining picture
3 difficulty indicators representative of picture difficulty
4 of the new scene, wherein said picture difficulty indicators
5 are ascertained by computing pixel-to-pixel differences in
6 at least some of horizontal, vertical, and diagonal
7 directions.

1 8. The method of claim 7, wherein said picture
2 difficulty indicators are ascertained by computing pixel-to-
3 pixel differences in each of said horizontal, vertical, and
4 diagonal directions.

1 9. The method of claim 7, wherein said ascertaining
2 comprises determining a maximum indicator for a frame
3 picture of a progressive video source or a field picture of
4 an interlaced video source, said maximum indicator being
5 determined by comparing said picture difficulty indicators
6 to each other.

1 10. The method of claim 7, wherein said ascertaining
2 comprises ascertaining picture difficulty indicators in
3 vertical and diagonal directions for both top and bottom
4 fields of a frame of an interlaced video source, and picture
5 difficulty indicators in vertical and diagonal directions
6 for the frame of the interlaced video source, and wherein
7 said ascertaining further comprises ascertaining field-based
8 indicators in vertical and diagonal directions by computing
9 a weighted summation of individual top and bottom field
10 indicators having a same direction, and wherein for each
11 vertical and diagonal direction, a picture difficulty
12 indicator is determined by ascertaining a minium number
13 between a corresponding field-based indicator and a frame-
14 based indicator derived from the same frame of the
15 interlaced video source.

1 11. The method of claim 10, wherein said ascertaining
2 comprises selecting said picture difficulty indicators by
3 determining a maximum indicator of the ascertained vertical
4 and diagonal indicators, as well as a horizontal indicator.

1 12. The method of claim 9, wherein said ascertaining
2 further comprises mapping the maximum indicator to a level
3 of an n-level quantizer if the value of the maximum
4 indicator is between predefined thresholds, and mapping the
5 maximum indicator to a constant number if the indicator is
6 outside of said predefined thresholds.

1 13. The method of claim 12, further comprising
2 employing said mapping to identify an address of a frequency
3 pattern in a look-up table, said look-up table containing a
4 plurality of frequency patterns, and wherein said
5 determining comprises selecting one frequency pattern of
6 said plurality of frequency patterns.

1 14 The method of claim 13, wherein when the maximum
2 indicator has a large nominal value it is re-mapped into a
3 frequency pattern comprising a lesser number of frequency
4 coefficients than a number of coefficients of a frequency
5 pattern corresponding to when the maximum indicator has a
6 smaller nominal value.

1 15. The method of claim 14, wherein said plurality of
2 frequency patterns are indexed such that a population of one
3 frequency pattern is a subset of a population of a frequency
4 pattern with a lower index number.

1 16. The method of claim 14, wherein said determining
2 comprises comparing each frequency coefficient of a block
3 with respect to said selected frequency pattern, and if the
4 coefficient belongs to the frequency pattern, the
5 coefficient is retained as part of said group of frequency
6 domain pixel data.

1 17. The method of claim 1, wherein after a final frame
2 count, if the actual frame bits is smaller than the
3 difference of a predefined number and a guard band value,
4 the difference is computed and a number of zero bytes
5 according to this difference is added to the final picture
6 count to ensure said pseudo-constant bits per frame
7 compressed signal.

1 18. The method of claim 1, wherein said method is
2 implemented within an MPEG encoder.

1 19. The method of claim 1, wherein said dynamically
2 encoding further comprises encoding said frame of the new
3 scene as a intra-coded frame.

1 20. A method for processing a sequence of video
2 frames, said method comprising:

3 dynamically encoding said sequence of video
4 frames, said dynamically encoding comprising:

5 encoding multiple blocks of a first frame of
6 the sequence of video frames in intra-coded mode
7 using a first orientation for said intra-coded
8 blocks; and

9 encoding multiple blocks of a second frame of
10 the sequence of video frames in intra-coded mode
11 using a second orientation for said intra-coded
12 blocks, wherein said first orientation and said
13 second orientation are perpendicular.

1 21. The method of claim 20, wherein said first
2 orientation comprises a first diagonal orientation, and said
3 second orientation comprises a second diagonal orientation.

1 22. The method of claim 21, wherein said first frame
2 and said second frame comprise adjacent frames in said
3 sequence of video frames.

1 23. The method of claim 21, wherein said multiple
2 intra-coded blocks of said first frame are scattered
3 throughout said first frame, and wherein said multiple
4 intra-coded blocks of said second frame are scattered
5 throughout said second frame.

1 24. The method of claim 21, wherein said multiple
2 intra-coded blocks of said first frame are equally spaced
3 along a direction perpendicular to said first orientation of
4 said multiple intra-coded blocks, and wherein said multiple
5 intra-coded blocks of said second frame are equally spaced
6 along a direction perpendicular to said second orientation
7 of the multiple intra-coded blocks.

1 25. The method of claim 21, wherein said encoding said
2 multiple blocks of said first frame in intra-coded mode
3 using said first orientation comprises imposing different
4 sub-sampling rates on said multiple intra-coded blocks along
5 said first orientation, and wherein said encoding multiple
6 blocks of said second frame in intra-coded mode using said
7 second orientation comprises imposing different sub-sampling
8 rates on said multiple intra-coded blocks along said second
9 orientation.

1 26. The method of claim 21, wherein said sequence of
2 video frames comprises a plurality of even numbered frames
3 and a plurality of odd numbered frames, and wherein said
4 first frame comprises one frame of said plurality of even
5 numbered frames and said second frame comprises one frame of
6 said plurality of odd numbered frames, and wherein intra-
7 coded blocks of said plurality of even numbered frames move
8 along said first orientation in a direction opposite from
9 that of intra-coded blocks moving along said second
10 orientation within said plurality of odd numbered frames.

1 27. A system for processing a sequence of video
2 frames, said system comprising:

3 an encoder for dynamically encoding said sequence
4 of video frames to produce a pseudo-constant bits per
5 frame compressed signal at a scene change within said
6 sequence of video frames, said encoder comprising:

7 means for detecting when a new scene occurs
8 in the sequence of video frames; and

9 means for dynamically determining a group of
10 frequency domain pixel data to be retained for a
11 frame of the new scene responsive to said
12 detecting of the new scene.

1 28. The system of claim 27, wherein said means for
2 dynamically determining comprises means for determining a
3 level of frequency domain pixel data to be retained from
4 multiple predefined levels, and wherein said means for
5 determining determines the level of frequency domain pixel
6 data to be retained for an initial frame of the new scene.

1 29. The system of claim 28, wherein said level of
2 frequency data to be retained is associated with a frequency
3 constraining pattern, and said means for determining
4 comprises means for selecting a frequency constraining
5 pattern to be employed from a plurality of frequency
6 constraining patterns associated with said multiple
7 predefined levels.

1 30. The system of claim 29, wherein said plurality of
2 frequency patterns comprise a common geometrical shape, and
3 wherein said common geometrical shape of said plurality of
4 frequency patterns can be one of a plurality of common
5 geometrical shapes.

1 31. The system of claim 29, wherein at least one most
2 significant frequency pixel is included by each of the
3 plurality of frequency constraining patterns.

1 32. The system of claim 27, wherein said means for
2 dynamically determining comprises means for determining said
3 group of frequency domain pixel data to be retained for said
4 frame of the new scene by evaluating picture difficulty of
5 the new scene.

1 33. The system of claim 32, wherein said means for
2 dynamically determining further comprises means for
3 ascertaining picture difficulty indicators representative of
4 picture difficulty of the new scene, wherein said picture
5 difficulty indicators are ascertained by computing pixel-to-
6 pixel differences in at least some of horizontal, vertical,
7 and diagonal directions.

1 34. The system of claim 33, wherein said picture
2 difficulty indicators are ascertained by computing pixel-to-
3 pixel differences in each of said horizontal, vertical, and
4 diagonal directions.

1 35. The system of claim 33, wherein said means for
2 ascertaining comprises means for determining a maximum
3 indicator for a frame picture of a progressive video source
4 or a field picture of an interlaced video source, said
5 maximum indicator being determined by comparing said picture
6 difficulty indicators to each other.

1 36. The system of claim 33, wherein said means for
2 ascertaining comprises means for ascertaining picture
3 difficulty indicators in vertical and diagonal directions
4 for both top and bottom fields of a frame of an interlaced
5 video source, and picture difficulty indicators in vertical
6 and diagonal directions for the frame of the interlaced
7 video source, and wherein said means for ascertaining
8 further comprises means for ascertaining field-based
9 indicators in vertical and diagonal directions by computing
10 a weighted summation of individual top and bottom field
11 indicators having a same direction, and wherein for each
12 vertical and diagonal direction, a picture difficulty
13 indicator is determined by ascertaining a minimum number
14 between a corresponding field-based indicator and a frame-
15 based indicator derived from the same frame of the
16 interlaced video source.

1 37. The system of claim 36, wherein said means for
2 ascertaining comprises means for selecting said picture
3 difficulty indicators by determining a maximum indicator of
4 the ascertained vertical and diagonal indicators, as well as
5 a horizontal indicator.

1 38. The system of claim 35, wherein said means for
2 ascertaining further comprises means for mapping the maximum
3 indicator to a level of an n-level quantizer if the value of
4 the maximum indicator is between predefined thresholds, and
5 for mapping the maximum indicator to a constant number if
6 the indicator is outside of said predefined thresholds.

1 39. The system of claim 38, further comprising means
2 for employing said mapping to identify an address of a
3 frequency pattern in a look-up table, said look-up table
4 containing a plurality of frequency patterns, and wherein
5 said means for determining comprises means for selecting one
6 frequency pattern of said plurality of frequency patterns.

1 40. The system of claim 39, wherein when the maximum
2 indicator has a large nominal value it is re-mapped into a
3 frequency pattern comprising a lesser number of frequency
4 coefficients than a number of coefficients of a frequency
5 pattern corresponding to when the maximum indicator has a
6 smaller nominal value.

1 41. The system of claim 40, wherein said plurality of
2 frequency patterns are indexed such that a population of one
3 frequency pattern is a subset of a population of a frequency
4 pattern with a lower index number.

1 42. The system of claim 40, wherein said means for
2 determining comprises means for comparing each frequency
3 coefficient of a block with respect to said selected
4 frequency pattern, and if the coefficient belongs to the
5 frequency pattern, the coefficient is retained as part of
6 said group of frequency domain pixel data.

1 43. The system of claim 27, wherein after a final
2 frame count, if the actual frame bits is smaller than a
3 difference of a predefined number and a guard band value,
4 said system further comprises means for computing the
5 difference and adding a number of zero bytes according to
6 this difference to the final picture count to ensure said
7 pseudo-constant bits per frame compressed signal.

1 44. The system of claim 27, wherein said encoder
2 comprises an MPEG encoder.

1 45. The system of claim 27, wherein said means for
2 dynamically encoding further comprises means for encoding
3 said frame of the new scene as a intra-coded frame.

1 46. A system for processing a sequence of video
2 frames, said system comprising:

3 an encoder for dynamically encoding said sequence
4 of video frames, said encoder comprising:

5 means for encoding multiple blocks of a first
6 frame of the sequence of video frames in an intra-
7 coded mode using a first orientation for said
8 intra-coded blocks; and

9 means for encoding multiple blocks of a
10 second frame of the sequence of video frames in
11 intra-coded mode using a second orientation for
12 said intra-coded blocks, wherein said first
13 orientation and said second orientation are
14 perpendicular.

1 47. The system of claim 46, wherein said first
2 orientation comprises a first diagonal orientation, and said
3 second orientation comprises a second diagonal orientation.

1 48. The system of claim 47, wherein said first frame
2 and said second frame comprise adjacent frames in said
3 sequence of video frames.

1 49. The system of claim 47, wherein said multiple
2 intra-coded blocks of said first frame are scattered
3 throughout said first frame, and wherein said multiple
4 intra-coded blocks of said second frame are scattered
5 throughout said second frame.

1 50. The system of claim 47, wherein said multiple
2 intra-coded blocks of said first frame are equally spaced
3 along a direction perpendicular to said first orientation of
4 said multiple intra-coded blocks, and wherein said multiple
5 intra-coded blocks of said second frame are equally spaced
6 along a direction perpendicular to said second orientation
7 of the multiple intra-coded blocks.

1 51. The system of claim 47, wherein said means for
2 encoding said multiple blocks of said first frame in intra-
3 coded mode using said first orientation comprises means for
4 imposing different sub-sampling rates on said multiple
5 intra-coded blocks along said first orientation, and wherein
6 said means for encoding multiple blocks of said second frame
7 in intra-coded mode using said second orientation comprises
8 means for imposing different sub-sampling rates on said
9 multiple intra-coded blocks along said second orientation.

1 52. The system of claim 47, wherein said sequence of
2 video frames comprises a plurality of even numbered frames
3 and a plurality of odd numbered frames, and wherein said
4 first frame comprises one frame of said plurality of even
5 numbered frames and said second frame comprises one frame of
6 said plurality of odd numbered frames, wherein intra-coded
7 blocks of said even numbered frames move along said first
8 orientation in a direction opposite from that of intra-coded
9 blocks moving along said second orientation within said
10 plurality of odd numbered frames.

1 53. A system for processing a sequence of video
2 frames, said system comprising:

3 an encoder for dynamically encoding said sequence
4 of video frames to produce a pseudo-constant bits per
5 frame compressed signal at a scene change within said
6 sequence of video frames, said encoder comprising a
7 frequency domain data management unit, said frequency
8 domain data management unit comprising:

9 a scene-change detector for detecting when a
10 new scene occurs in the sequence of video frames;

11 a picture difficulty evaluator for evaluating
12 picture difficulty of the new scene;

13 a frequency classifier and constrainer for
14 dynamically determining a group of frequency
15 domain pixel data to be retained for a frame of
16 the new scene responsive to said detecting of the
17 new scene and complexity of the picture as
18 determined by said picture difficulty evaluator.

1 54. A system for processing a sequence of video
2 frames, said system comprising:

3 an encoder for dynamically encoding said sequence
4 of video frames, said encoder comprising:

5 an intra-updater unit for assigning which
6 blocks of a plurality of blocks of a frame are to
7 be intra-coded, wherein said intra-updater unit
8 facilitates:

9 encoding multiple blocks of a first
10 frame of the sequence of video frames in an
11 intra-coded mode using a first orientation
12 for said intra-coded blocks; and

13 encoding multiple blocks of a second
14 frame of the sequence of video frames in
15 intra-coded mode using a second orientation
16 for said intra-coded blocks, wherein said
17 first orientation and said second orientation
18 are perpendicular.

1 55. At least one program storage device readable by a
2 machine, tangibly embodying at least one program of
3 instructions executable by the machine to perform a method
4 for processing a sequence of video frames, said method
5 comprising:

6 dynamically encoding said sequence of video frames
7 to produce a pseudo-constant bits per frame compressed
8 signal at a scene change within said sequence of video
9 frames, said dynamically encoding comprising:

10 detecting when a new scene occurs in the
11 sequence of video frames; and

12 responsive to said detecting, dynamically
13 determining a group of frequency domain pixel data
14 to be retained for a frame of the new scene.

1 56. The at least one program storage device of claim
2 55, wherein said dynamically determining comprises
3 determining a level of frequency domain pixel data to be
4 retained from multiple predefined levels, and wherein said
5 determining determines the level of frequency domain pixel
6 data to be retained for an initial frame of the new scene.

1 57. The at least one program storage device of claim
2 56, wherein said level of frequency data to be retained is
3 associated with a frequency constraining pattern, and said
4 determining comprises selecting a frequency constraining
5 pattern to be employed from a plurality of frequency
6 constraining patterns associated with said multiple
7 predefined levels.

1 58. The at least one program storage device of claim
2 57, wherein said plurality of frequency patterns comprise a
3 common geometrical shape, and wherein said common
4 geometrical shape of said plurality of frequency patterns
5 can be one of a plurality of common geometrical shapes.

1 59. The at least one program storage device of claim
2 57, wherein at least one most significant frequency pixel is
3 included by each of the plurality of frequency constraining
4 patterns.

1 60. The at least one program storage device of claim
2 55, wherein said dynamically determining comprises
3 determining said group of frequency domain pixel data to be
4 retained for said frame of the new scene by evaluating
5 picture difficulty of the new scene.

1 61. The at least one program storage device of claim
2 60, wherein said dynamically determining further comprises
3 ascertaining picture difficulty indicators representative of
4 picture difficulty of the new scene, wherein said picture
5 difficulty indicators are ascertained by computing pixel-to-
6 pixel differences in at least some of horizontal, vertical,
7 and diagonal directions.

1 62. The at least one program storage device of claim
2 61, wherein said picture difficulty indicators are
3 ascertained by computing pixel-to-pixel differences in each
4 of said horizontal, vertical, and diagonal directions.

1 63. The at least one program storage device of claim
2 61, wherein said ascertaining comprises determining a
3 maximum indicator for a frame picture of a progressive video
4 source or a field picture of an interlaced video source,
5 said maximum indicator being determined by comparing said
6 picture difficulty indicators to each other.

1 64. The at least one program storage device of claim
2 61, wherein said ascertaining comprises ascertaining picture
3 difficulty indicators in vertical and diagonal directions
4 for both top and bottom fields of a frame of an interlaced
5 video source, and picture difficulty indicators in vertical
6 and diagonal directions for the frame of the interlaced
7 video source, and wherein said ascertaining further
8 comprises ascertaining field-based indicators in vertical
9 and diagonal directions by computing a weighted summation of
10 individual top and bottom field indicators having a same
11 direction, and wherein for each vertical and diagonal
12 direction, a picture difficulty indicator is determined by
13 ascertaining a minium number between a corresponding field-
14 based indicator and a frame-based indicator derived from the
15 same frame of the interlaced video source.

1 65. The at least one program storage device of claim
2 64, wherein said ascertaining comprises selecting said
3 picture difficulty indicators by determining a maximum
4 indicator of the ascertained vertical and diagonal
5 indicators, as well as a horizontal indicator.

1 66. The at least one program storage device of claim
2 63, wherein said ascertaining further comprises mapping the
3 maximum indicator to a level of an n-level quantizer if the
4 value of the maximum indicator is between predefined
5 thresholds, and mapping the maximum indicator to a constant
6 number if the indicator is outside of said predefined
7 thresholds.

1 67. The at least one program storage device of claim
2 63, further comprising employing said mapping to identify an
3 address of a frequency pattern in a look-up table, said
4 look-up table containing a plurality of frequency patterns,
5 and wherein said determining comprises selecting one
6 frequency pattern of said plurality of frequency patterns.

1 68. The at least one program storage device of claim
2 67, wherein when the maximum indicator has a large nominal
3 value it is re-mapped into a frequency pattern comprising a
4 lesser number of frequency coefficients than a number of
5 coefficients of a frequency pattern corresponding to when
6 the maximum indicator has a smaller nominal value.

1 69. The at least one program storage device of claim
2 68, wherein said plurality of frequency patterns are indexed
3 such that a population of one frequency pattern is a subset
4 of a population of a frequency pattern with a lower index
5 number.

1 70. The at least one program storage device of claim
2 68, wherein said determining comprises comparing each
3 frequency coefficient of a block with respect to said
4 selected frequency pattern, and if the coefficient belongs
5 to the frequency pattern, the coefficient is retained as
6 part of said group of frequency domain pixel data.

1 71. The at least one program storage device of claim
2 55, wherein after a final frame count, if the actual frame
3 bits is smaller than the difference of a predefined number
4 and a guard band value, the difference is computed and a
5 number of zero bytes according to this difference is added
6 to the final picture count to ensure said pseudo-constant
7 bits per frame compressed signal.

1 72. The at least one program storage device of claim
2 55, wherein said method is implemented within an MPEG
3 encoder.

1 73. The at least one program storage device of claim
2 55, wherein said dynamically encoding further comprises
3 encoding said frame of the new scene as a intra-coded frame.

1 74. At least one program storage device readable by a
2 machine, tangibly embodying at least one program of
3 instructions executable by the machine to perform a method
4 of processing a sequence of video frames, said method
5 comprising:

6 dynamically encoding said sequence of video
7 frames, said dynamically encoding comprising:

8 encoding multiple blocks of a first frame of
9 the sequence of video frames in intra-coded mode
10 using a first orientation for said intra-coded
11 blocks; and

12 encoding multiple blocks of a second frame of
13 the sequence of video frames in intra-coded mode
14 using a second orientation for said intra-coded
15 blocks, wherein said first orientation and said
16 second orientation are perpendicular.

1 75. The at least one program storage device of claim
2 74, wherein said first orientation comprises a first
3 diagonal orientation, and said second orientation comprises
4 a second diagonal orientation.

1 76. The at least one program storage device of claim
2 75, wherein said first frame and said second frame comprise
3 adjacent frames in said sequence of video frames.

1 77. The at least one program storage device of claim
2 75, wherein said multiple intra-coded blocks of said first
3 frame are scattered throughout said first frame, and wherein
4 said multiple intra-coded blocks of said second frame are
5 scattered throughout said second frame.

1 78. The at least one program storage device of claim
2 75, wherein said multiple intra-coded blocks of said first
3 frame are equally spaced along a direction perpendicular to
4 said first orientation of said multiple intra-coded blocks,
5 and wherein said multiple intra-coded blocks of said second
6 frame are equally spaced along a direction perpendicular to
7 said second orientation of the multiple intra-coded blocks.

1 79. The at least one program storage device of claim
2 75, wherein said encoding said multiple blocks of said first
3 frame in intra-coded mode using said first orientation
4 comprises imposing different sub-sampling rates on said
5 multiple intra-coded blocks along said first orientation,
6 and wherein said encoding multiple blocks of said second
7 frame in intra-coded mode using said second orientation
8 comprises imposing different sub-sampling rates on said
9 multiple intra-coded blocks along said second orientation.

1 80. The at least one program storage device of claim
2 75, wherein said sequence of video frames comprises a
3 plurality of even numbered frames and a plurality of odd
4 numbered frames, and wherein said first frame comprises one
5 frame of said plurality of even numbered frames and said
6 second frame comprises one frame of said plurality of odd
7 numbered frames, and wherein intra-coded blocks of said
8 plurality of even numbered frames move along said first
9 orientation in a direction opposite from that of intra-coded
10 blocks moving along said second orientation within said
11 plurality of odd numbered frames.

* * * * *

METHOD AND APPARATUS FOR PRODUCING
PSEUDO-CONSTANT BITS PER PICTURE VIDEO
BIT-STREAMS FOR LOW-DELAY COMPRESSION SYSTEM

Abstract of the Disclosure

5 A frequency domain data management technique for
producing pseudo-constant bits per picture compressed video
bit-streams in a low delay digital encoding environment is
presented. This technique forms a hierarchy among the
localized samples of the picture in terms of frequency
10 importance and the picture difficulty after a shot-change is
detected. After a shot change, the data management technique
implements a series of tasks composed of picture difficulty
evaluation, frequency classification, frequency
constraining, and zero bytes generation to achieve a pre-
15 determined average picture bits. Further, the low delay
encoder uses a unique updating mechanism to encode certain
regions of the pictures in intra mode and ensures that the
whole picture is updated after a pre-selected number of
pictures. The updating method disseminates compression
20 artifacts throughout the video stream by changing the
orientation of the intra-coded regions for every picture and
scatters intra-picture compression artifacts by spatially
decimating the aforementioned regions at different rates.

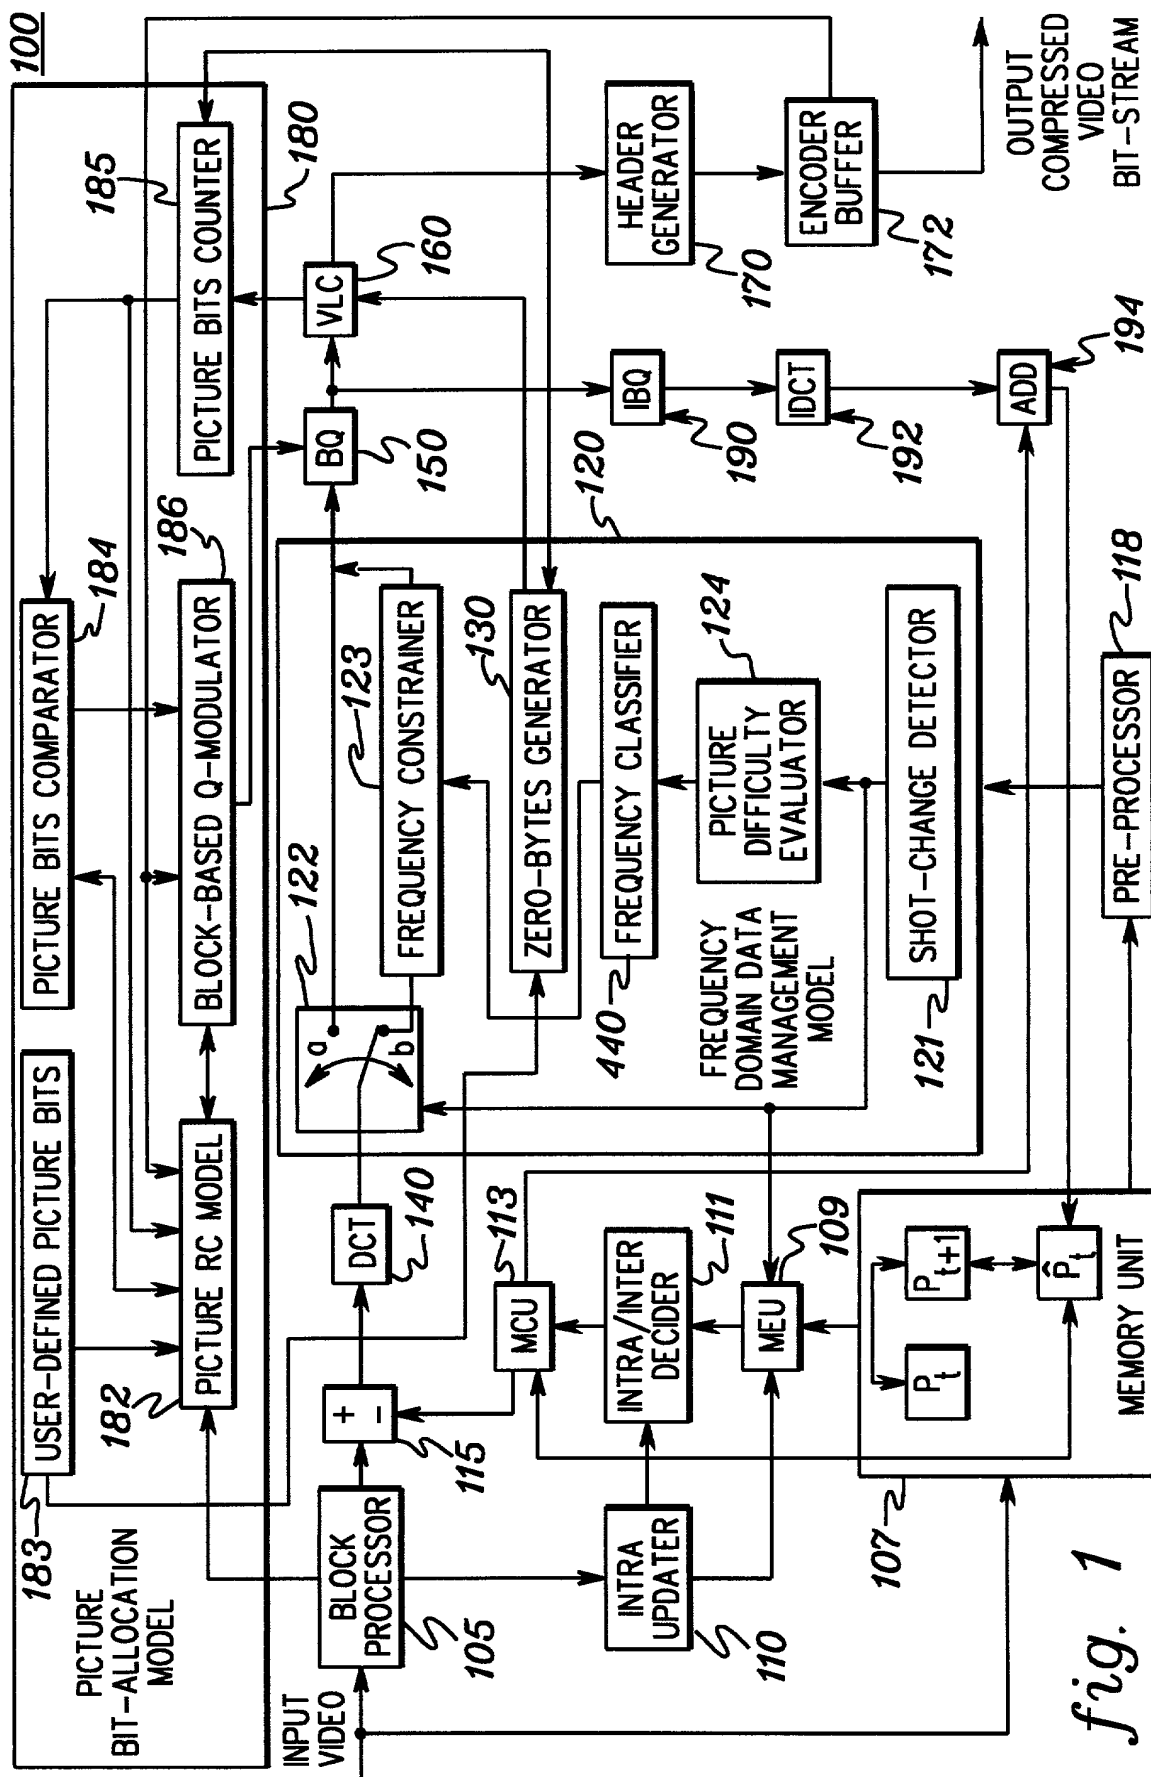


fig. 1

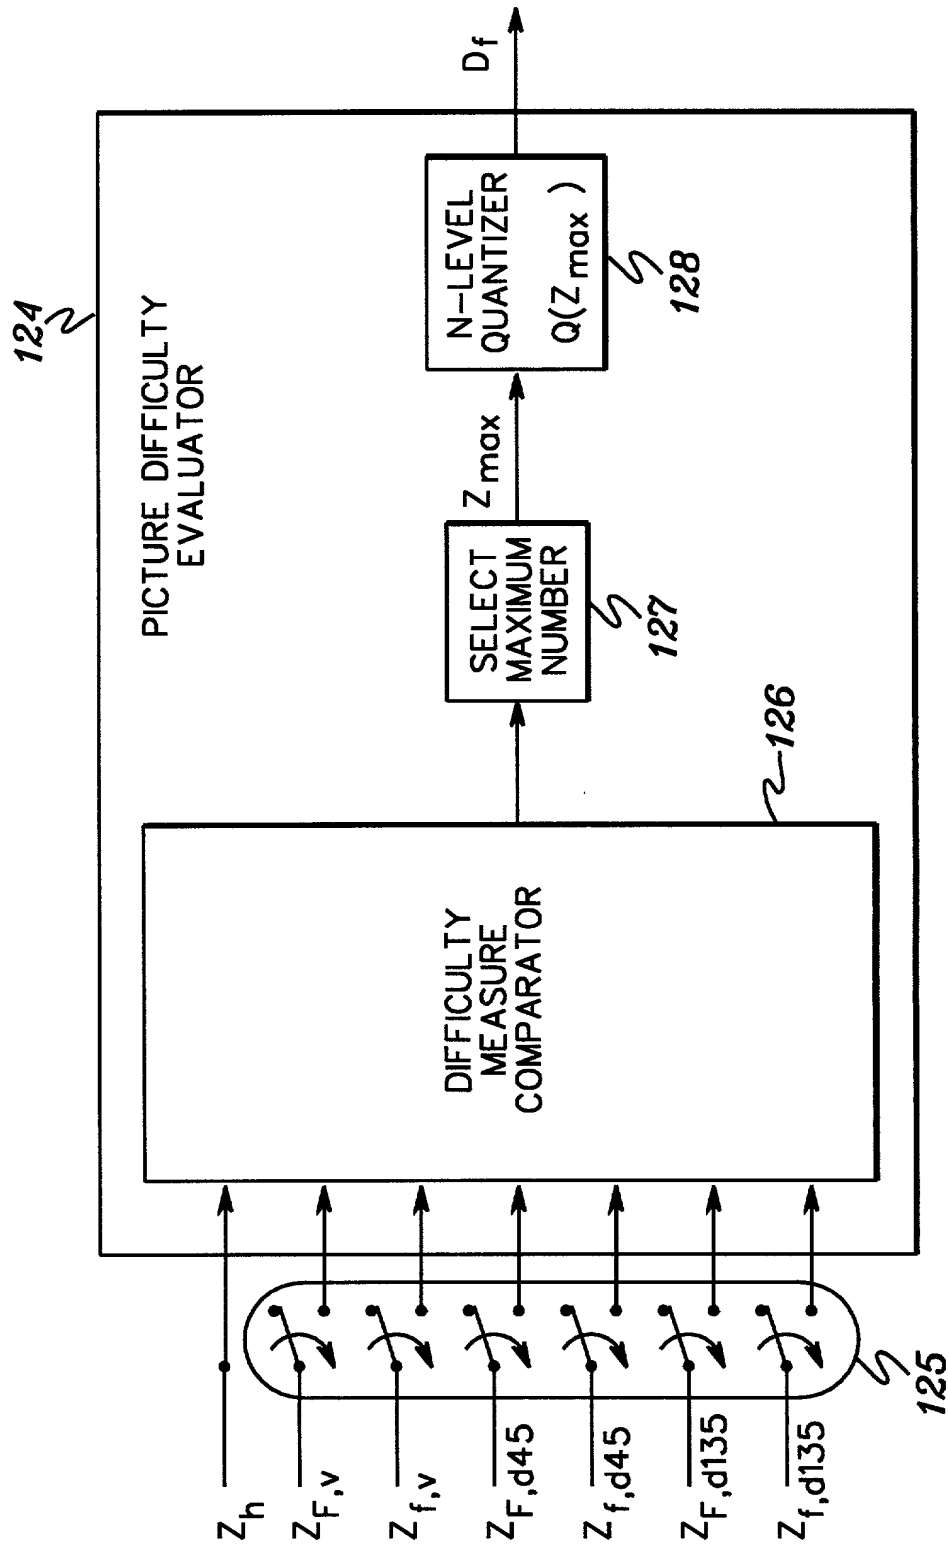


fig. 2

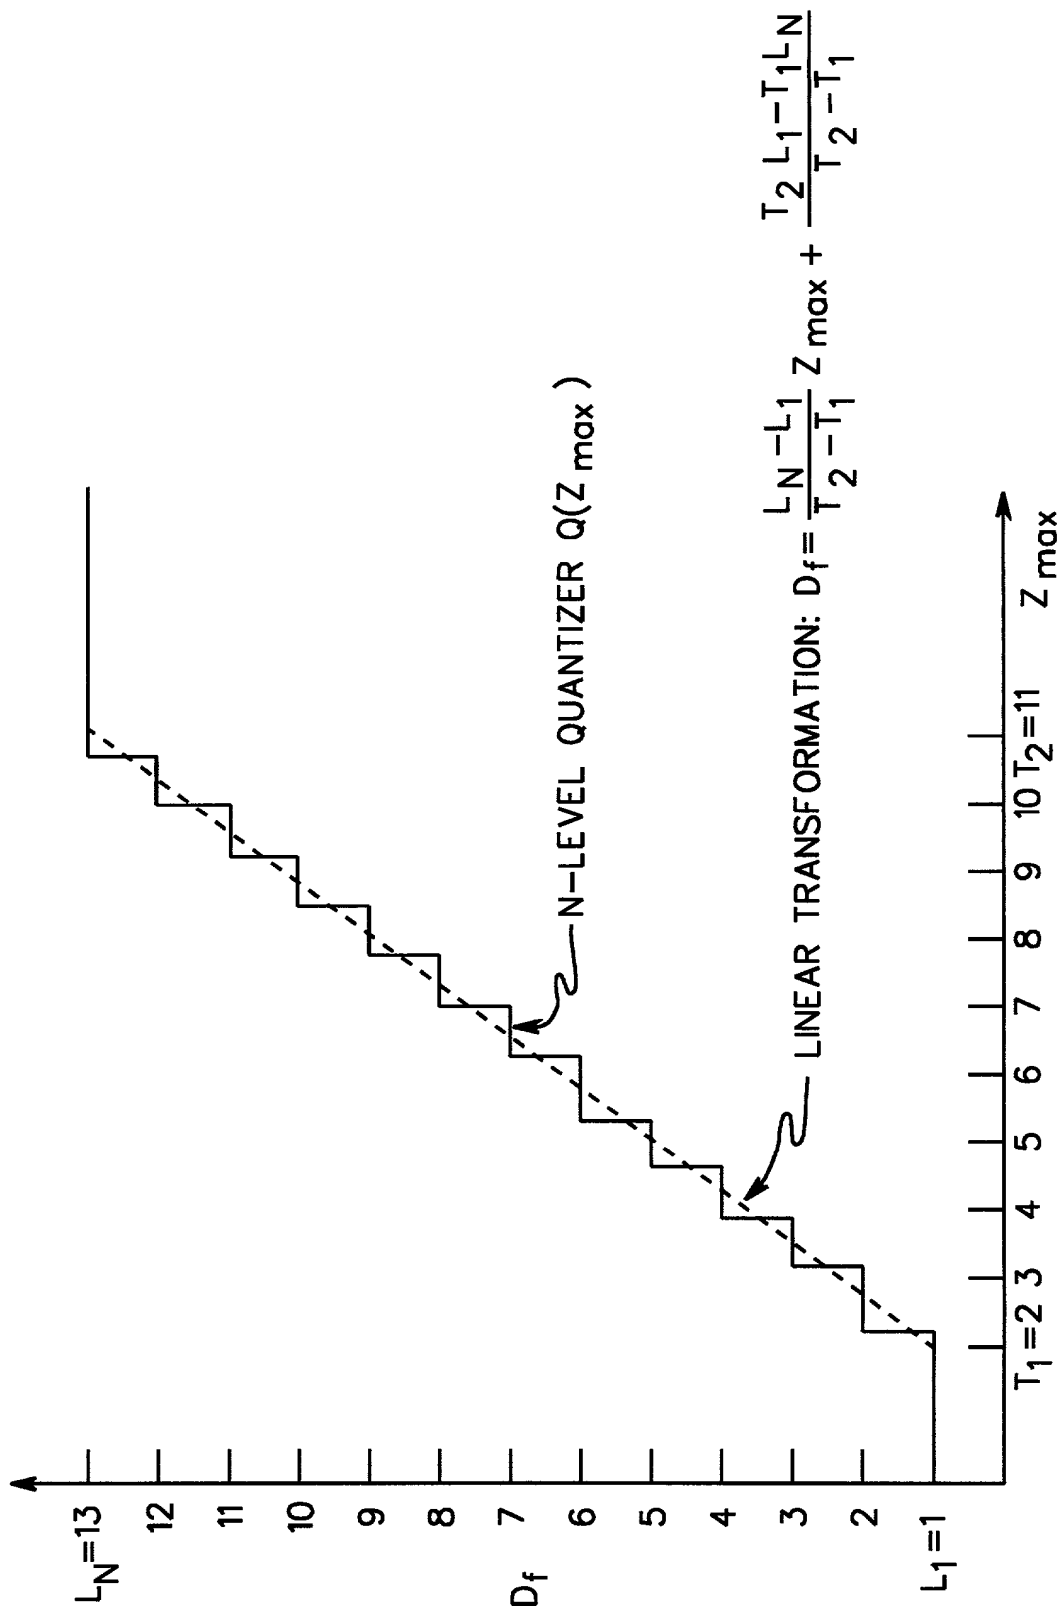
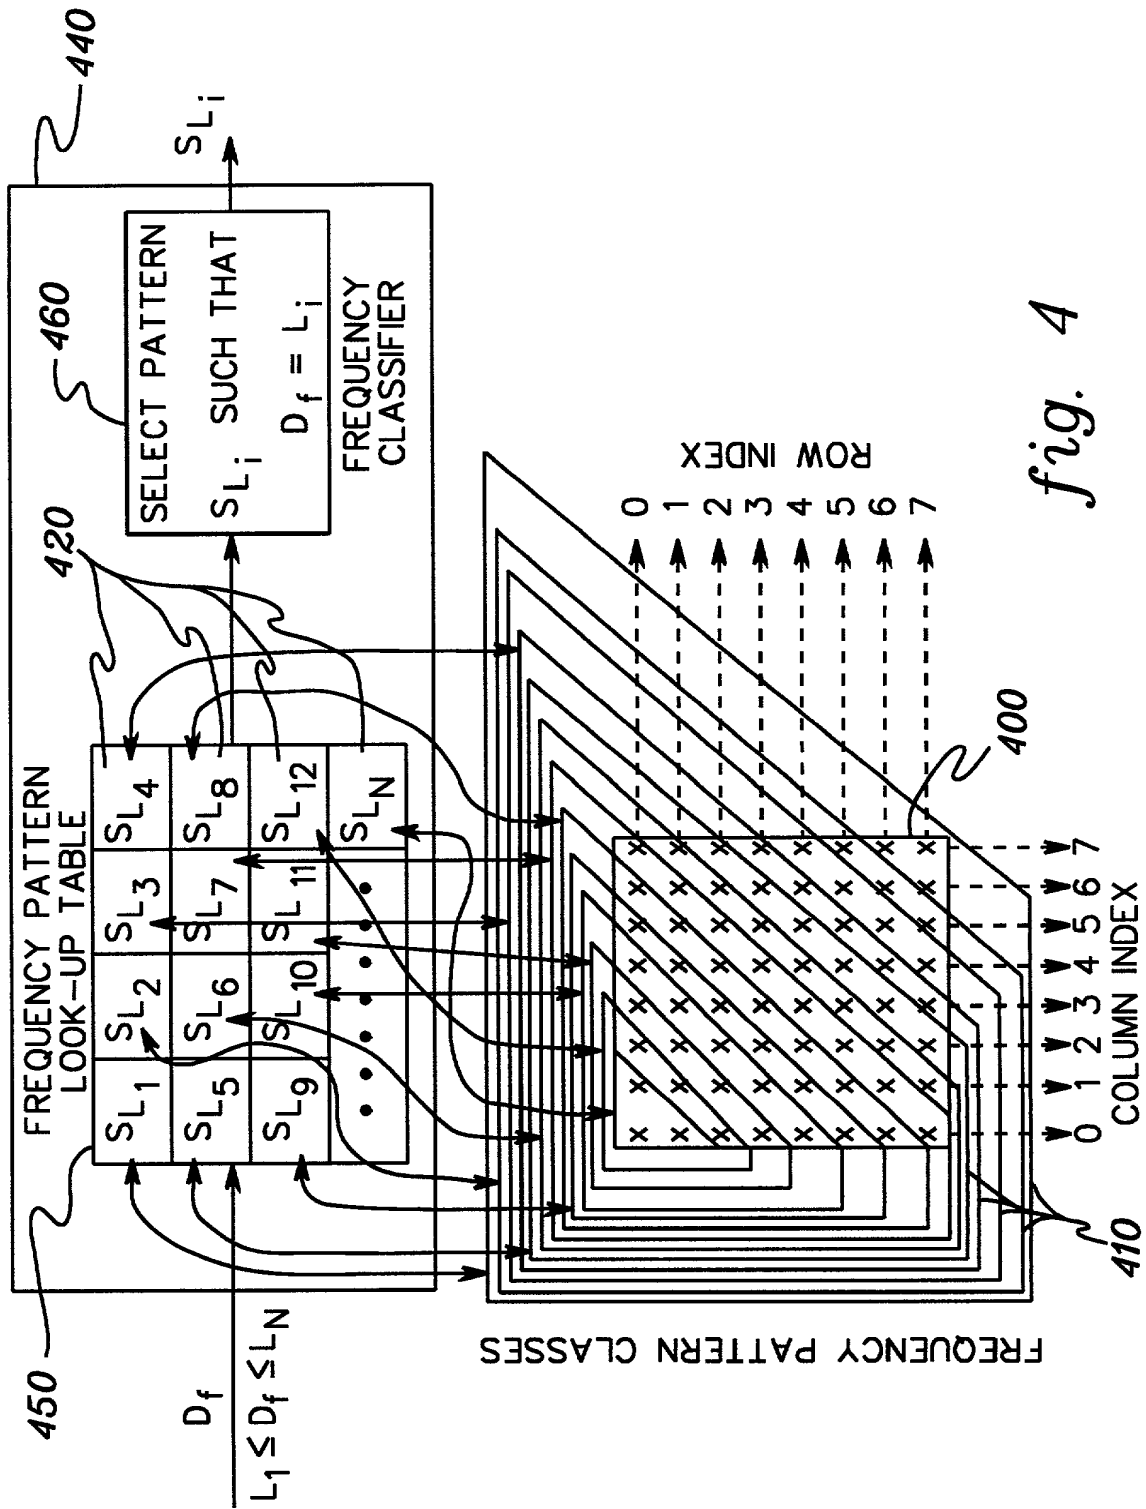


fig. 3



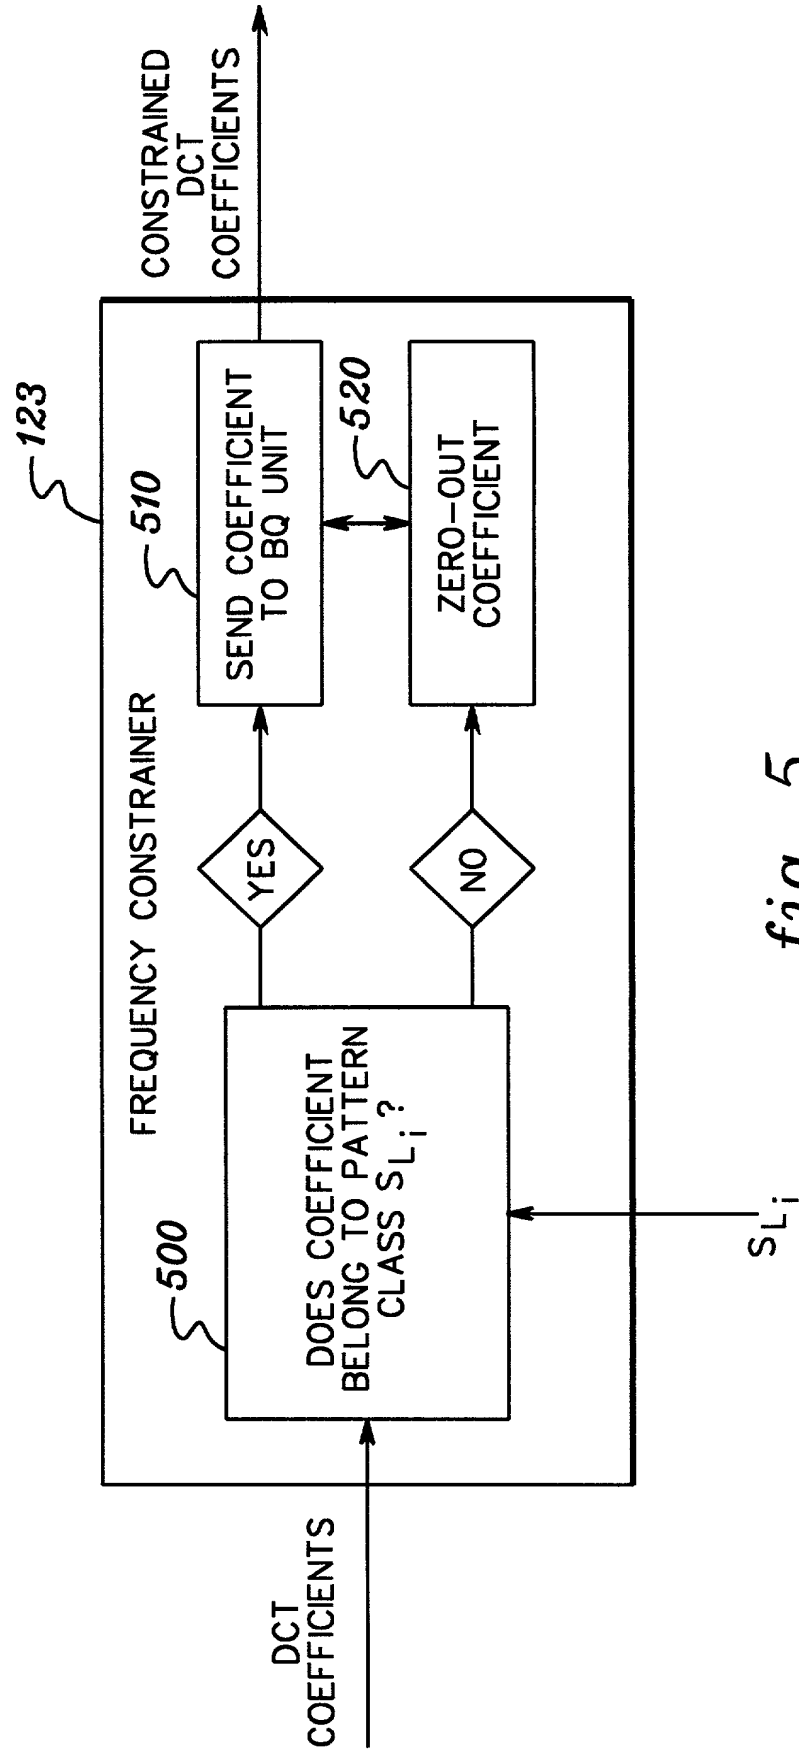


fig. 5

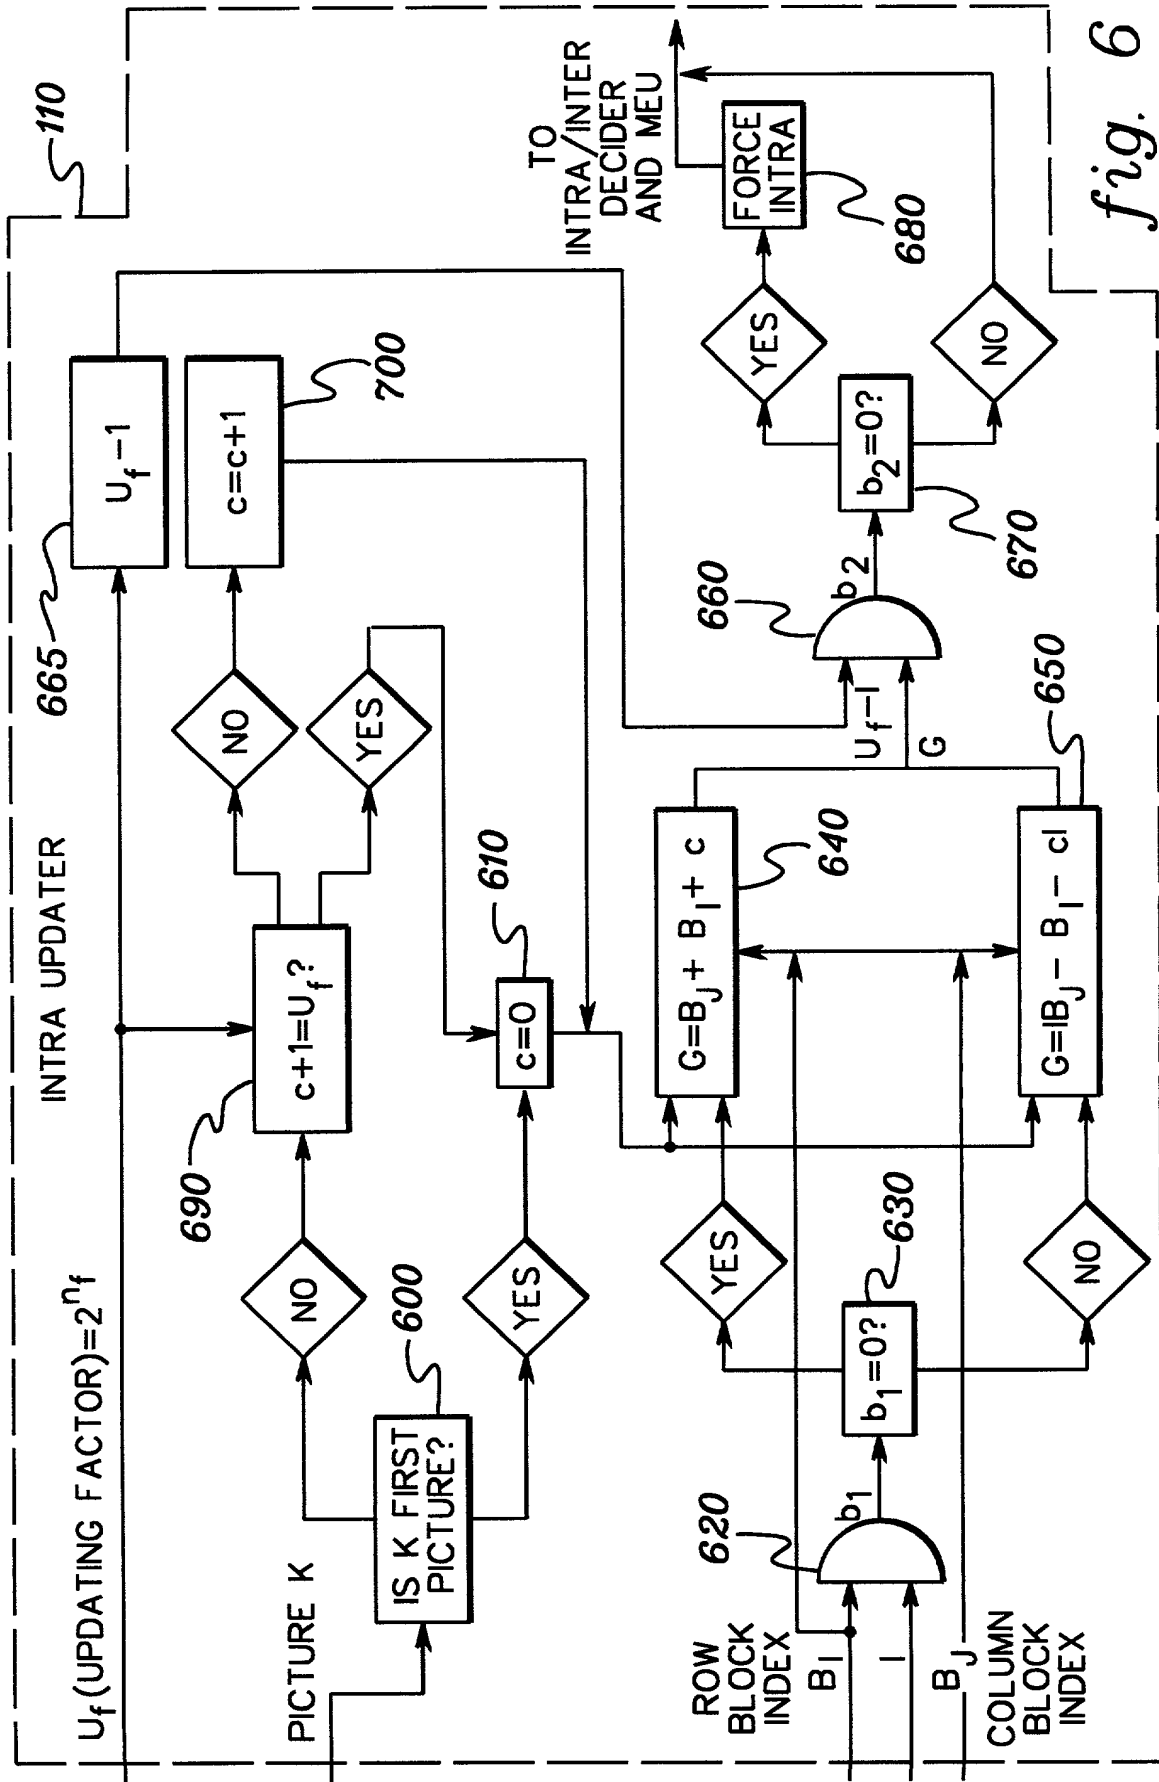


fig. 6

DECLARATION AND POWER OF ATTORNEY FOR PATENT APPLICATION

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name. I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

**METHOD AND APPARATUS FOR PRODUCING
PSEUDO-CONSTANT BITS PER PICTURE VIDEO
BIT-STREAMS FOR LOW-DELAY COMPRESSION SYSTEM**

the specification of which (check one)

 X is attached hereto.

 was filed on as United States
Application Number or PCT International Application
Number and was amended on
 .

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above. I acknowledge the duty to disclose to the U.S. Patent and Trademark Office all information known to me to be material to patentability as defined in 37 CFR § 1.56.

I hereby claim foreign priority benefits under 35 U.S.C. § 119(a)-(d) or § 365(b) of any foreign application(s) for patent or inventor's certificate, or § 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below any foreign application for patent or inventor's certificate, or PCT International application having a filing date before that of the application on which priority is claimed.

Priority Claimed

<u> </u> (Number)	<u> </u> (Country)	<u> </u> (Day/Month/Year Filed)	<u> </u> Yes <u> </u> No
<u> </u> (Number)	<u> </u> (Country)	<u> </u> (Day/Month/Year Filed)	<u> </u> Yes <u> </u> No

I hereby claim the benefit under 35 U.S.C. §119(e) of any United States provisional application(s) listed below.

<u> </u> (Application Number)	<u> </u> (Filing Date)
---	--

<u> </u> (Application Number)	<u> </u> (Filing Date)
---	--

I hereby claim the benefit under 35 U.S.C. § 120 of any United States application(s), or § 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of 35 U.S.C. § 112, I acknowledge the duty to disclose material information as defined in 37 CFR §1.56(a) which occurred between the filing date of the prior application and the national or PCT International filing date of this application:

(Appl. Serial No.)	(Filing Date)	(Status) (patented, pending, abandoned)
--------------------	---------------	---

(Appl. Serial No.)	(Filing Date)	(Status) (patented, pending, abandoned)
--------------------	---------------	---

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith:

Christopher A. Hughes, Esq.	Reg. No. 26,914
Edward A. Pennington, Esq.	Reg. No. 32,588
John E. Hoel, Esq.	Reg. No. 26,279
Joseph C. Redmond, Jr., Esq.	Reg. No. 18,753
David L. Adour, Esq.	Reg. No. 29,604
Lawrence R. Fraley, Esq.	Reg. No. 26,885
Arthur J. Samodovitz, Esq.	Reg. No. 31,297
William H. Steinberg, Esq.	Reg. No. 28,540
John R. Pivnichny, Ph.D.	Reg. No. 43,001
Jeff Rothenberg, Esq.	Reg. No. 26,429
Kevin P. Radigan, Esq.	Reg. No. 31,789
Blanche E. Schiller, Esq.	Reg. No. 35,670

Send Correspondence to:

Kevin P. Radigan, Esq.
HESLIN & ROTHENBERG, P.C.
5 Columbia Circle
Albany, New York 12203-5160
Telephone: (518) 452-5600
Facsimile: (518) 452-5579

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

**ADDED PAGES TO COMBINED DECLARATION AND POWER OF ATTORNEY
FOR SIGNATURE BY FIRST AND SUBSEQUENT INVENTORS**

Full Name of first joint inventor: **Charles E. Boice**

Signature: Charles E. Boice Date: 10-23-00

Residence: 46 PEMBROKE DR LEB.
~~111 Smithfield Drive~~, Endicott, New York 13760

Citizenship: United States of America

Post Office Address: 46 PEMBROKE DR LEB.
~~111 Smithfield Drive~~

Endicott, New York 13760

Full Name of second joint inventor: **Brian J. Cascarino**

Signature: Brian J. Cascarino Date: 10-23-00

Residence: 153 McFadden Road, Apalachin, New York 13732

Citizenship: United States of America

Post Office Address: 153 McFadden Road
Apalachin, New York 13732

Full Name of third joint inventor: **Nader Mohsenian**

Signature: Nader Mohsenian Date: 10/26/00

Residence: Ravens Crest Apartments, 57-20 Ravens Crest Drive,
Plainsboro, New Jersey 08536

Citizenship: Iran

Post Office Address: Ravens Crest Apartments
57-20 Ravens Crest Drive
Plainsboro, New Jersey 08536